AVIATION AND AERONAUTICAL ENGINEERING

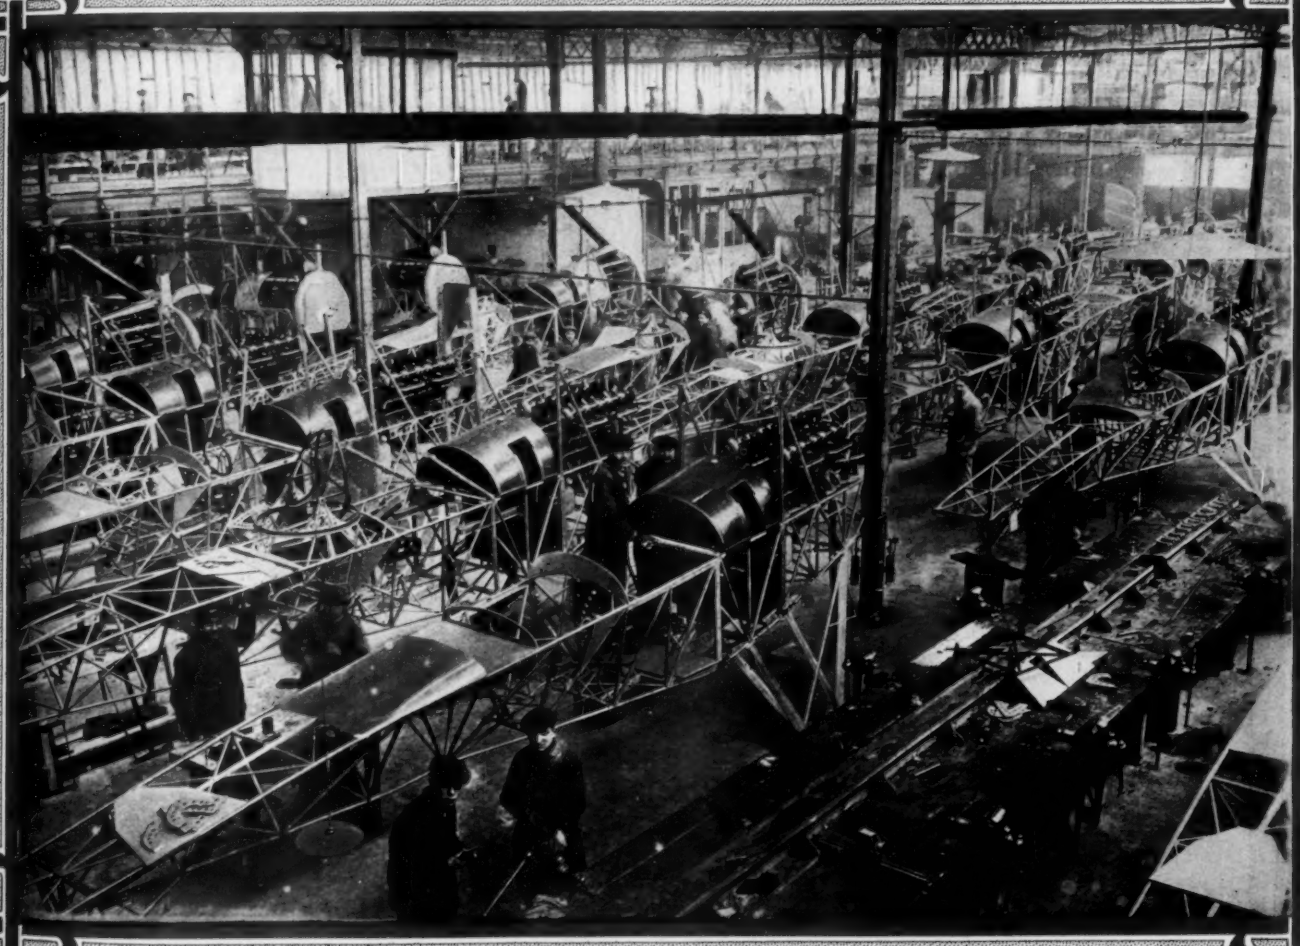

Press Illustrating Service, Inc.

A French Airplane Factory Near Paris

APRIL 15th 1917

PRICE Ten Cents

SPECIAL FEATURES

AMERICAN SEARCHLIGHT STOPS ZEPPELIN RAIDS

ADVISORY COMMITTEE REPORTS ON PATENT SITUATION

EMERGENCY LANDINGS IN CROSS-COUNTRY FLYING

COURSE IN AERODYNAMICS AND AIRPLANE DESIGN

PUBLISHED SEMI-MONTHLY
BY
THE GARDNER, MOFFAT CO., Inc.
120 W 32nd ST NEW YORK

AERO STANDARD CORPORATION

Only the Best Goes Into Standard Airplanes

Every part that goes into *Standard Airplanes* is the best that money can produce or purchase.

The engines are powerful motors, especially designed to meet the *Standard* requirements. The frame of the fuselage is made of highest quality ash, while the frame of the planes is made of finest spruce.

Every inch of wire is the best that can be made for the purpose.

Even the treatment which is given to the linen covering of fuselage and planes shows *Standard* excellence. The dull-finish varnish with which these parts are painted prevents any glare that might become objectionable or confusing.

All the way through, the *Standard* is the best.

STANDARD AERO CORPORATION

Factory: **Plainfield, N. J.**

Executive Offices: **Woolworth Building, N. Y. C.**

HALL-SCOTT

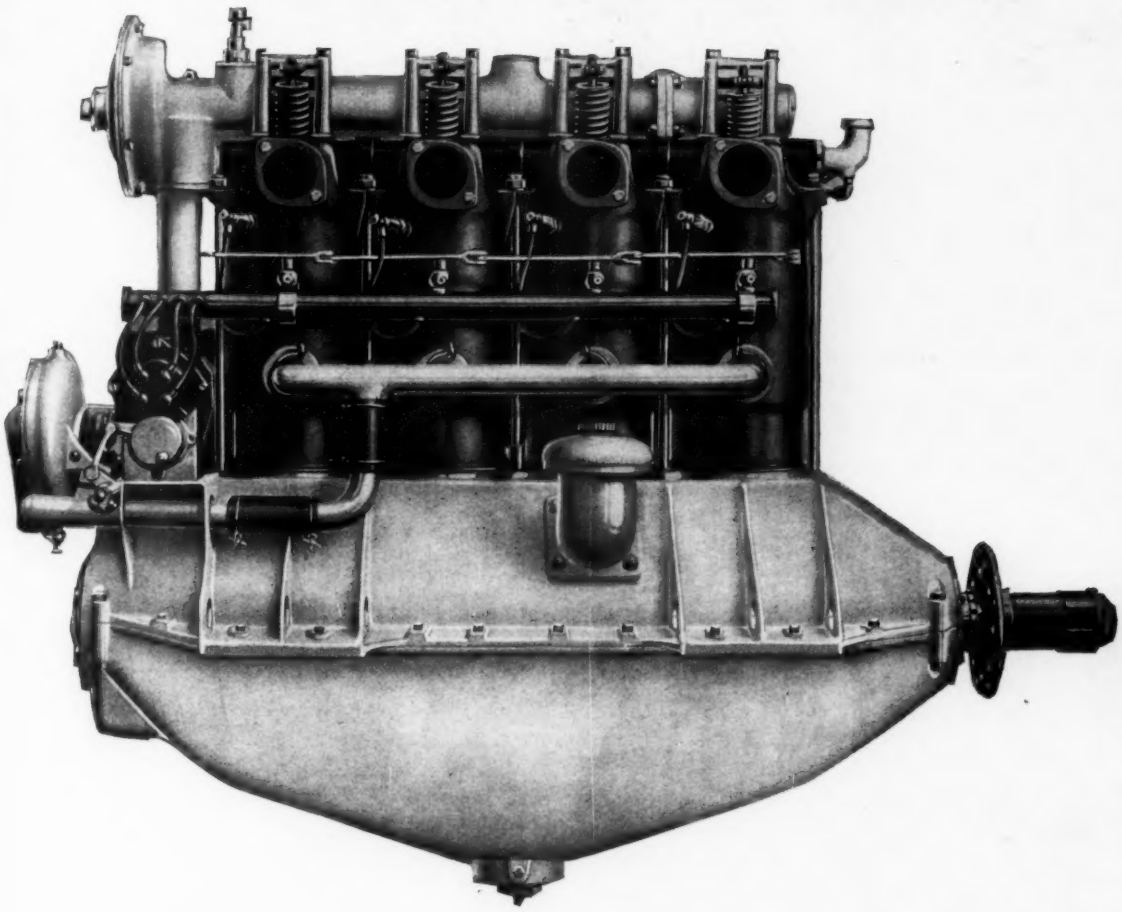

The Hall-Scott, Type A-7a, 100 H.P., Four Cylinder, Airplane Engine, is offered as the most ideal equipment the market affords, for Army and Navy TRAINING and LIGHT SCOUTING Machines.

The design of this engine provides for sturdy construction, coupled with light weight. With proper use, 100 hours of actual flying service may be obtained without overhauling.

Governments that have knowledge of excessive upkeep costs of lighter type, short duration engines, of complicated design and delicate mechanism, will be interested in this equipment.

Total weight, complete and ready for service, but without lubricating oil, 400 lbs.	
Weight per H.P. (Based on actual H.P. development, at 1,300 R.P.M.)	*3.50 "*
Consumption gasoline in lbs. per H.P. hour, ...	*.557*
" lubricating oil " " "	*.045*

The Perfect Air Starter, used in connection with this engine, will afford ideal starting service. Added weight of the starting equipment, complete, 56 lbs.

Hall-Scott Motor Car Co., Inc.
General Offices
Crocker Bldg., San Francisco, Calif.

F. P. Whitaker
EASTERN REPRESENTATIVE
165 Broadway, New York City

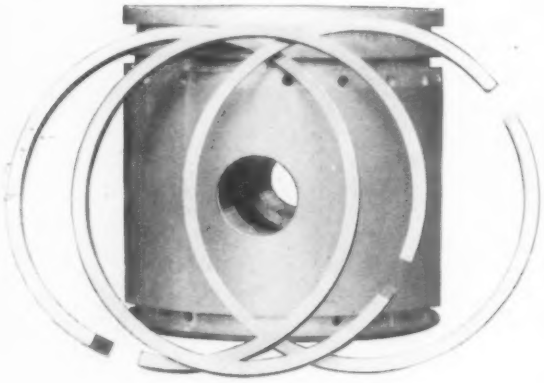

PISTONS

Made from specially developed Sturtevant Aluminum Alloy and provided with three simple piston rings.

Sturtevant
REG. U. S. PAT. OFF.
B. F. STURTEVANT COMPANY
Hyde Park, Boston, Massachusetts

·L·W·F·ENGINEERING·COMPANY·

THE NEW WATER SPORT OF THE SUPERMAN

Instruction

in a General Aeroplane Co's Verville Type Flying Boat will convert the ardent speed motor boat enthusiast to the virile man making sport of flying

"PREPAREDNESS"

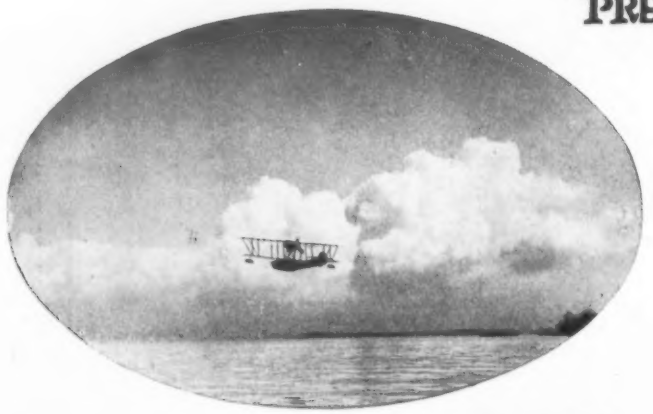

Office — 1507 East Jefferson Ave.

GENERAL AEROPLANE CO.
Detroit U.S.A

Hangars Old Detroit Motor Boat Site

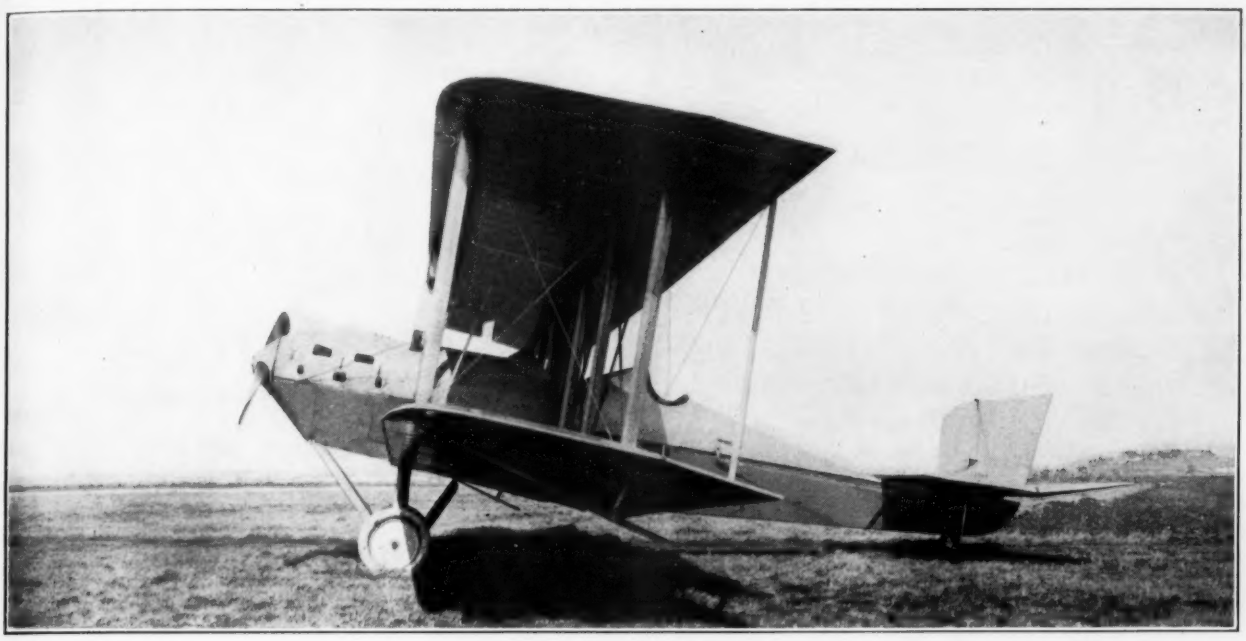

Sturtevant
REG. U.S. PAT. OFF.

Speed range with two persons and four hours fuel *38-75 M.P.H.
Powered with Sturtevant 8 cyl. 140 H.P. Aluminum Motor.

Unusual Load-carrying and Safety Reserve

STURTEVANT AEROPLANE CO. JAMAICA PLAIN—BOSTON

ACKERMAN WHEELS

Are not an experiment. They have been successfully tested on airplanes under the most adverse starting and landing conditions.

Their development is based on exhaustive tests running over a period of four years.

They combine maximum resiliency and strength. In the words of Captain A. W. Briggs, formerly of the Royal Flying Corps of Great Britain, who tested the Ackerman Wheels on U. S. Government Military Biplane No. 76:

" . . . the wheels proved to do all that was claimed for them and more, as their resiliency perfectly absorbed all shock before it reached the axle, causing the machine to hold the ground after a drop and have little or no tendency to bounce, as is the usual case in such landings. Over bad ground the uneven surface was, to all intents and purposes, smoothed out, causing easy riding to the machine."

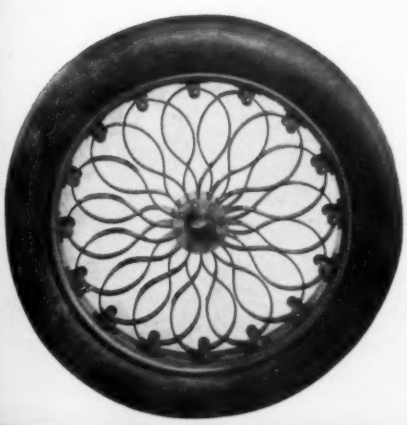

ACKERMAN WHEELS are built in different sizes to carry any load from 500 pounds up to 5 tons.

THE ACKERMAN WHEEL CO.
ROCKEFELLER BUILDING, CLEVELAND, O.

Spherical Balloon Fabric Standardized

AFTER thorough investigation of theory and practice here and in Europe, we have standardized our balloon fabrics on the bases of tensile strength, diffusion and coating.

Years of successful manufacture of these fabrics and of spherical balloons have given us the necessary verification by experience for the principles developed in our laboratories.

Our 80,000 cubic feet capacity Goodyear Spherical which won the international race at Paris in 1913 is one of a number of successes.

We have since built a number of balloons of similar type and of various sizes.

Our aeronautical experts will gladly answer inquiries regarding our fabrics and principles of balloon construction.

We manufacture Rubberized Fabric—Spherical, Kite and Dirigible Balloons of any size, every type and for any purpose—sporting, exhibition, military and naval—Aeroplane Tires, Tubes, Rubber Bumpers, Rims and other aeronautical supplie

The Goodyear Tire & Rubber Co.
Akron, Ohio

GOODYEAR AKRON

"NORMA"

"NORMA" BALL BEARINGS

(Patented)

Aeroplane performance reduces itself to a question of engine performance—which, in turn, is determined by the type of ignition used. Dependable engine performance—which is prerequisite to dependable aeroplane service—demands dependable magnetos. Here is an identifying mark of such magnetos:—

The magnetos used on automobiles, motor trucks, motor boats, aeroplanes and tractors of the better class are—almost without exception—fitted with "NORMA" Bearings, because of the superlative service qualities of "NORMA" Bearings at high magnetos peeds.

Be *Sure*—See That Your Magneto is "NORMA" Equipped

THE NORMA COMPANY OF AMERICA
1790 BROADWAY NEW YORK
Ball, Roller, Thrust, Combination Bearings

"NORMA"

APRIL 15, 1917

AVIATION AND AERONAUTICAL ENGINEERING

VOL. II. NO. 6

Member of the Associated Business Papers

INDEX TO CONTENTS

	PAGE
Editorial	255
Six United States Army Wing Sections	256
Course in Aerodynamics and Airplane Design.	261
Aeronautical Patents	266
Emergency Landings in Cross-Country Flying.	267
Advisory Committee Reports on Patent Situation	268
Aero Club Banquet	269
American Searchlight Stops Zeppelin Raids	269
Notes of the Memphis Training Station	269
Duesenberg Refinanced	270
Alterations in Curtiss Triplane	270

THE GARDNER, MOFFAT COMPANY, Inc., *Publishers*

120 WEST 32D STREET NEW YORK

SUBSCRIPTION PRICE: ONE DOLLAR PER YEAR. SINGLE COPIES TEN CENTS. CANADA AND FOREIGN: ONE DOLLAR AND A HALF A YEAR. COPYRIGHT, 1917, BY THE GARDNER, MOFFAT COMPANY, INC.

ISSUED ON THE FIRST AND FIFTEENTH OF EACH MONTH FORMS CLOSE FIVE DAYS PREVIOUSLY. ENTERED AS SECOND-CLASS MATTER, AUGUST 3, 1916, AT THE POST OFFICE AT NEW YORK, N. Y., UNDER ACT OF MARCH 3, 1879.

GREATEST ACHIEVEMENT IN AVIATION IN 1916

SPERRY SYNCHRONIZED DRIFT SET

Was Awarded the Collier Trophy

For Development and Thorough Demonstration

Automatically Corrects the Compass for All Drift

THE SPERRY GYROSCOPE COMPANY

125 Rue De Provence, Paris

Factory, Manhattan Bridge Plaza, Brooklyn, New York

15 Victoria Street, London

AVIATION TRAINING

THE CURTISS School of Aviation will give training this winter, in Florida, to those civilians who may be accepted by the Aviation Section, U. S. A., upon their having made application for enlistment in the Aviation Reserve Corps. Applicants must be between twenty-one and twenty-seven years of age, possess good health, character and college education or equivalent. Tuition will be paid by the Government.

FOR FURTHER INFORMATION WRITE

THE CURTISS TRAINING SCHOOLS

CHURCHILL STREET, BUFFALO, N. Y.

Curtiss

We give Military Aviation Training at either of our Established Schools—Newport News, Va., and Miami, Fla.

America Trans-Oceanic Co., 280 Madison Ave., New York City, New York Agents. R. V. Morris, Coronado, Cal., Pacific Coast Agent.

Curtiss

President and Editor
LESTER D. GARDNER

Military Editor
PHILIP J. ROOSEVELT

AVIATION AND AERONAUTICAL ENGINEERING

Technical Editor
A. KLEMIN, A.C.G.I., B.Sc., S.M.
Instructor in Aeronautics
Massachusetts Institute of Technology

Managing Editor
HERBERT M. WILLIAMS, B.S.

Vol. II | April 15, 1917 | No. 6

IT is a gravely critical fact that the Navy Department can only place on file at present applications for training from civilian fliers who cannot fly and the War Department is in a similar predicament. Civilian schools are assisting in the training of young men who are desirous of entering the services, but the facilities of these schools are entirely inadequate for the training of the 4000 aviators which the National Advisory Committee for Aeronautics has estimated are necessary for our Army and Navy.

The War Department already has more applicants on its lists than there is any possibility of its being able to train for months. Literally thousands of applications for examination for commissions in the Officers Reserve Corps are pigeon-holed in the War Department files. Until the output of machines is enormously increased these applications cannot be acted upon. It has recently been publicly announced that all the airplanes and seaplanes which the Army and Navy together can expect to receive before January 1, 1918, are limited to about 600.

Another limitation upon the Government's ability to train fliers lies in its inability to get a large corps of competent instructors. About five pupils per instructor has been found by experience to give the best results. But the Government's corps of flying instructors is unfortunately small. It has been found that more than one-half the civilian fliers who have sought positions as civilian instructors for the Government were unable to give military instruction in aviation.

The rush of young men anxious to learn to fly has not been equalled by any rush of mechanics anxious to care for airplanes. Civilians anxious to learn to fly are easy to find in thousand lots. Mechanics trained in the care of aeronautical equipment are lamentably scarce. Both the Army and Navy in the regular establishment as well as in the Reserves are anxious to secure first class machinists, carpenters and engine men. The mechanics of an air squadron are almost as responsible for the squadron's success or failure as the aviators. With literally thousands of applications on file from civilians who wish the Government to teach them to fly, there is a noticeable shortage of mechanics of the best type in the Army, the Navy, the Naval Reserve and the Signal Enlisted Reserve Corps.

But even more important and discouraging than the shortage of flying instructors and of mechanics is the limited output of machines. The output of airplanes must be speeded up. In the first place, standardization of parts must be given immediate consideration. It has been on the tip of the tongue wherever aeronautics was discussed for the past year. To date, however, practically no tables of standard parts are available and even where tables are available engineers and draughtsmen are reluctant to utilize standard equipment.

The second thing that can be done to speed up production is the placing of a cash deposit of 25 per cent of the purchase price with every order which the Government places for aeronautic material. At the present time this is specifically forbidden by the laws of the United States. However, it is a practice employed in all daily business by every Government which is at war except the United States. It is of pressing importance that the practice be instituted in this country especially for increasing the output of aeronautic material. Only Congressional legislation will make this possible.

Aviation and Aeronautical Engineering does not pretend that the adoption of standards by the constructors or the adoption by the Government of the practice of making part payments in advance will result in getting a sufficient supply of airplanes for the United States. But if the two steps outlined are taken it will be a definite help.

Meanwhile, mechanics desiring information about entering the Regular Service or the Signal Enlisted Reserve Corps for aviation duty should apply to the Chief Signal Officer, United States Army, Washington, D. C. If they wish aviation duty with the Navy either in the regular or reserve forces, they should apply to the commandant of the Naval District in which they reside.

U. S. A. Aerofoils

In this issue, our readers will find a report from the Massachusetts Institute of Technology on the recent tests conducted there on a number of wing sections developed by the Aviation Section of the Signal Corps, U. S. A. The announcement of these sections marks a distinct advance in aeronautical practice. In using the Eiffel and R. A. F. sections which have been almost universally employed hitherto, constructors have had to pay the penalty for efficiency and good lifting power by more or less successfully combatting structural difficulties.

The development of these sections will go a long way to remove the incompatibility hitherto present between aerodynamical excellence and practical facility of construction. It is too early to say whether some of these sections are altogether superior to such well known wing-curves as those developed by Eiffel and the R. A. F., but further comparative tests are in progress and the indication is that the new wing sections will mark a decided improvement.

Six United States Army Wing Sections

By Captains Edgar S. Gorrell and H. S. Martin, U. S. A.*

These wing sections, developed by the Aviation Section of the Signal Corps, offer considerable interest both from an aerodynamical and a structural point of view. Developed partly from the latter point, they have proved to be efficient and show very satisfactory lift coefficients.

Structural Development of the Sections

In Fig. 1 are shown the dimensioned outlines of the six sections tested. Some of the considerations involved in developing the sections are interesting.

The U. S. A. 1 is a modification of the Clark aerofoil (characteristics and dimensions of which are described in Hunsaker's "*Dynamical Stability of Aeroplanes*"). This was an excellent high speed wing with a maximum lift-drift of 18. By increasing the depth at the position of rear spar, it was made structurally much more practical, the maximum lift was increased and the maximum lift-drift ratio only reduced very slightly.

The U. S. A. 2 has the same upper surface as the R. A. F. 3 but the lower surface has been modified and deepened from a structural point of view, without any loss from the aerodynamical point of view.

The U.S.A. 3 and U.S.A. 4 are both modifications of the U.S.A. 2. In the first section, the nose of a 30-in. chord has been moved forward 3/8-in. and the ordinates of the first fifth of the 30-in. chord spread out accordingly. In the U. S. A. 4, the nose of a 30-in. chord has been moved back 3/8-in. and the ordinates of the first fifth of the 30-in. chord crowded out accordingly.

The U.S.A. 5 was skillfully developed from both structural and aerodynamic considerations, with very satisfactory results.

Results of Tests

The tests were conducted under the standard conditions. Results for Ky, Kx, L/D and center of pressure motion are given in Table 1, and in the curves of Figs. 2, 3 and 4. The wind tunnel speed was 30 m. p. h. in every case, and the models 18-in. span by 3-in. chord—the dimensions generally employed, and useful on that score for purposes of comparison.

The National Physical Laboratory results, as published in the British Reports, are based on LV (chord of wing in feet $\times$ velocity of relative wind in feet/second) values of 6.3. In Eiffel's large laboratory with greater wind speeds the values of LV range from 16 to 40. The Institute tests are conducted with an intermediate value of 11 for LV. It is, therefore, not possible to make strictly accurate comparisons without further tests which are now in progress at the Institute. It is, however, perfectly clear that, apart from the good structural features, the sections have remarkably good aerodynamic properties.

In Table 2, comparative figures for the six sections are set out in accordance with the plan employed, in the Course in Aerodynamics and Airplane Design (AVIATION AND AERONAUTICAL ENGINEERING, October 1, 1916), together with values for the R. A. F. 3, R. A. F. 6, and Eiffel 32; the drift and L/D values for the latter being subject to revision as stated on completion of above tests.

For none of the wings does the maximum Ky fall below .003, except almost negligably so for U. S. A. 6. For all the wings, there is a wide range of working angles. None of them exhibit a sharp drop at the burble point. With the exception of U. S. A. 4, they all have good maximum values of L/D at the small value of $Ky = .00086$. From the center of pressure curves in Fig. 4, it is seen that none of the wings may be said to be longitudinally stable, but none of them have a violent center of pressure motion within the usual range, and with modern non-lifting tail surfaces, no difficulty would be met in securing longitudinal stability.

TABLE 2

		Maximum L/D			Maximum K_y			K = .00086	
Aerofoil	LV = chord of wing in ft. × relative wind in ft./sec.	Angle in degrees	K_y	L/D	Angle in degrees	K_y	L/D	Angle in degrees	L/D
U. S. A. 1.	11	3.0	.00133	17.8	15.0	.00318	9.6	+0.62	12.9
U. S. A. 2.	11	4.0	.00169	16.3	15.0	.00337	9.3	+0.0	9.9
U. S. A. 3.	11	4.0	.001704	16.4	13.6	.003243	9.8	−0.3	10.4
U. S. A. 4.	11	4.0	.00177	15.88	15.0	.00364	9.1	−0.35	9.1
U. S. A. 5.	11	3.0	.001565	16.21	14.0	.003285	9.25	−0.18	11.8
U. S. A. 6.	11	3.0	.001455	17.4	14.0	.00298	7.37	+0.1	13.3

Foreign Sections

		Maximum K_y			Maximum L/D			K_y = .00086	
Aerofoil	LV = chord of wing in ft. × relative wind in ft./sec.	Angle in degrees	K_y	L/D	Angle in degrees	K_y	L/D	Angle in degrees	L/D
Eiffel 32..	49	....	0.00280	...	3.0	0.00103	18.2	2.2	18.0
R. A. F. 3.	6.3	15.7	0.00347	7.8	5.0	0.00195	14.3	−0.1	7.4
R. A. F. 6.	6.3	15.4	0.00310	7.8	4.9	0.00157	14.6	1.9	10.4

It is noteworthy that the U. S. A. 4 has a higher maximum lift coefficient than almost any wing section tested, — .00364, compared with .00347 of the R. A. F. 3. It should have an L/D of approximately the same value and is far better structurally. This wing would seem to be particularly suitable for very heavy machines, such as seaplanes.

U. S. A. 1 has a higher lift than Eiffel 32—namely, .00318, compared with approximately .00280, and its maximum L/D of 17.8 would, in the Eiffel tunnel, probably exceed the 18.2 of the French wing. Although for small values of Ky and high speeds, the Eiffel 32 has better efficiency, U. S. A. 6, also with a higher maximum lift, would compare most favorably in a high speed machine with any French wing of which data has hitherto been published. For pursuit machines, the choice between U. S. A. 1 and 6 would be very close. U. S. A. 1 would give a better landing speed and U. S. A. 6 is slightly more efficient at low angles and high speeds.

U. S. A. 2 and 3 would be good all round wings apparently slightly better than the R. A. F. 6.

An interesting feature of the series is the successful employment of heavy camber on upper and lower surfaces. It has been commonly accepted that heavy camber meant increase in lift with corresponding decrease in efficiency, while lightly cambered wings would give high efficiency but low lift. With skilful design, it is apparently possible to retain both good features.

* By permission of Professor C. H. Peabody, Professor of Naval Architecture, in Charge of Department of Aeronautical Engineering, Massachusetts Institute of Technology. Abstract by Alexander Klemin and T. H. Huff.

AERODYNAMIC LABORATORY TESTS

TABLE 1.

U. S. A. 1.

L of i	K_y	K_x	L/D	Distance of C. P. from leading edge, in fractional part of chord.
−4°	−.000399	.0001515	2.64	....
−2°	.000156	.0000905	1.72	....
−1°	.000432	.0000700	6.15	.620
0°	.000721	.0000653	11.00	.530
1°	.000936	.0000670	14.00	.463
2°	.001146	.0000688	16.60	.415
4°	.001510	.0000860	17.50	.340
6°	.001878	.0001158	16.20	.316
8°	.002230	.0001558	14.30	.303
10°	.002580	.0002055	12.60	.290
12°	.002910	.0002595	11.20	.283
14°	.003165	.0003040	10.40	.274
16°	.003165	.0003710	8.50	.276
18°	.003080	.0005520	5.60	.310
20°	.002882	.0008500	3.40	.360

U. S. A. 2.

L of i	K_y	K_x	L/D	Distance of C. P. from leading edge, in fractional part of chord.
−4°	−.000228	.000147	−1.55	....
−2°	.000363	.000108	3.37	.733
−1°	.000625	.0000943	6.64	.522
0°	.000862	.0000872	9.88	.445
1°	.001075	.0000816	13.26	.388
2°	.001292	.0000848	15.22	.352
4°	.001678	.0001027	16.34	.317
6°	.002090	.0001320	15.80	.292
8°	.002432	.000175	13.88	.276
12°	.003179	.000270	11.75	.255
16°	.003362	.000410	8.20	.247
18°	.003100	.000701	4.41	.228
20°	.002770	.000871	3.18	.230

U. S. A. 3.

L of i	K_y	K_x	L/D	Distance of C. P. from leading edge, in fractional part of chord.
−4°	−.000506	.0001589	−3.19	....
−2°	.000420	.0001052	3.99	.676
−1°	.000692	.0000845	8.20	.482
0°	.000928	.0000835	11.10	.403
1°	.001123	.0000856	13.10	.353
2°	.001310	.0000889	14.75	.323
3°	.001508	.0000893	16.16	.295
4°	.001704	.0001073	15.88	.280
5°	.001919	.0001180	16.18	.260
8°	.002520	.0001823	13.82	.230
10°	.002905	.0002290	12.70	.220
12°	.003160	.0002830	11.15	.208
13°	.003235	.0003142	10.30	.204
14°	.003240	.0003410	9.50	.197
15°	.003215	.0003780	8.50	.197
16°	.003155	.0004460	7.02	.197
18°	.003125	.0006620	4.73	.236
20°	.002889	.0008570	3.37	.266

U. S. A. 4

L of i	K_y	K_x	L/D	Distance of C. P. from leading edge, in fractional part of chord.
−4°	−.0001231	.0001640	−0.75	....
−2°	.0005200	.0001150	4.52	.670
−1°	.0007650	.0001078	7.11	.525
0°	.0009750	.0001032	9.44	.461
1°	.0011840	.0001002	11.80	.416
2°	.0013820	.0000995	13.90	.388
4°	.0017700	.0001115	15.88	.347
5°	.0019800	.0001340	14.80	.330
8°	.0025600	.0001900	13.50	.298
10°	.0029900	.0002555	11.70	.273
12°	.0033100	.0003100	10.67	.276
14°	.0036000	.0003545	10.15	.276
16°	.0036150	.0004430	8.15	.276
18°	.0034700	.0005580	6.22	.303
20°	.0031000	.0007640	4.06	.335

U. S. A. 5

L of i	K_y	K_x	L/D	Distance of C. P. from leading edge, in fractional part of chord.
−4°	−.000326	.0001500	−1.58	....
−2°	.000346	.0000948	3.64	.753
−1°	.000636	.0000830	7.67	.566
0°	.000910	.0000741	12.28	.498
1°	.001145	.0000803	14.28	.444
2°	.001355	.0000863	15.72	.415
3°	.001565	.0000966	16.21	.377
4°	.001740	.0001092	15.98	.348
5°	.001950	.0001290	15.35	.337
8°	.002470	.0001830	13.52	.315
10°	.002870	.0002380	12.08	.303
12°	.003130	.0002890	10.84	.300
13°	.003240	.0003290	9.84	.298
14°	.003285	.0003545	9.25	.288
15°	.003235	.0003910	8.28	.292
16°	.003205	.0004210	7.63	.298
18°	.003150	.0006900	4.57	.330
20°	.002790	.0008200	3.41	.368

U. S. A. 6

L of i	K_y	K_x	L/D	Distance of C. P. from leading edge, in fractional part of chord.
−4°	−.000276	.0001395	−1.98	....
−2°	.000272	.0000793	3.43	.910
−1°	.000567	.0000671	8.46	.600
0°	.000845	.0000650	13.00	.498
1°	001057	.0000668	15.88	.458
2°	.001255	.0000733	17.15	.439
3°	.001455	.0000858	16.98	.402
4°	.001662	.0000976	17.05	.388
5°	.001846	.0001121	16.48	.365
8°	.002415	.0001665	14.50	.322
10°	.002650	.0002160	12.27	.306
12°	.002861	.0002820	10.15	.310
13°	.002910	.0003260	8.94	.310
14°	.002980	.0004050	7.37	.310
15°	.00296C	.0005300	5.58	.328
16°	.002900	.0006380	4.55	.346
18°	.002790	.0007900	3.53	.365
20°	.002585	.0009000	2.88	.388

L of *i* = Angle of wing chord to wind.
Ky = Lift coefficient in lbs./sq. ft./MPH.
Kx = Drift coefficient in lbs./sq. ft./MPH.

L/D = Ratio of lift to drift.
Model: Size, 18″ x 3″ (54 sq. in.). Material, Brass.
Velocity of wind: 30 MPH.
Density of satandard air: .07608 lbs./cu. ft.

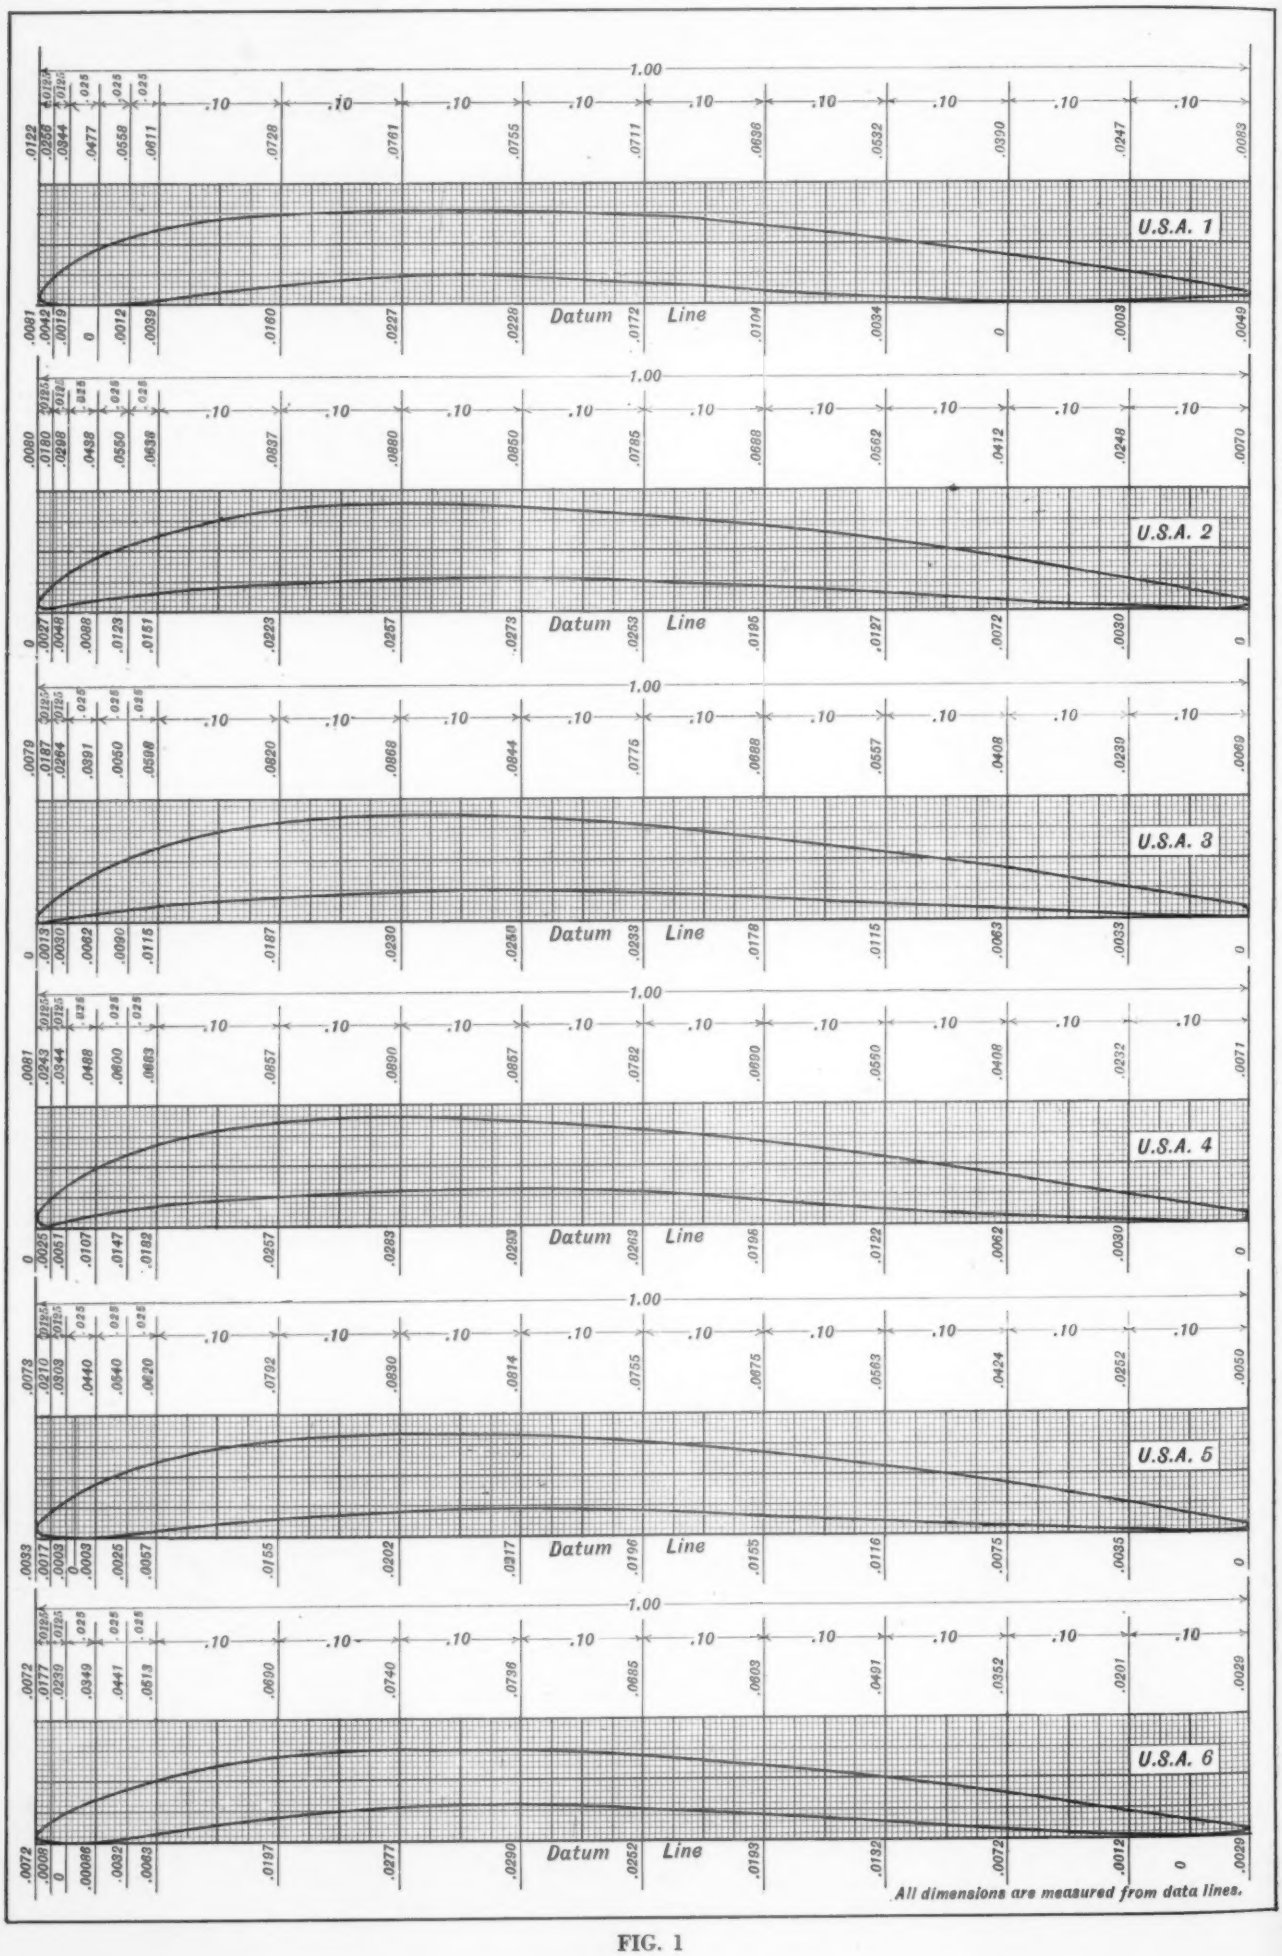
U.S.A. 1
U.S.A. 2
U.S.A. 3
U.S.A. 4
U.S.A. 5
U.S.A. 6
Datum Line
1.00
.10
All dimensions are measured from data lines.

FIG. 1

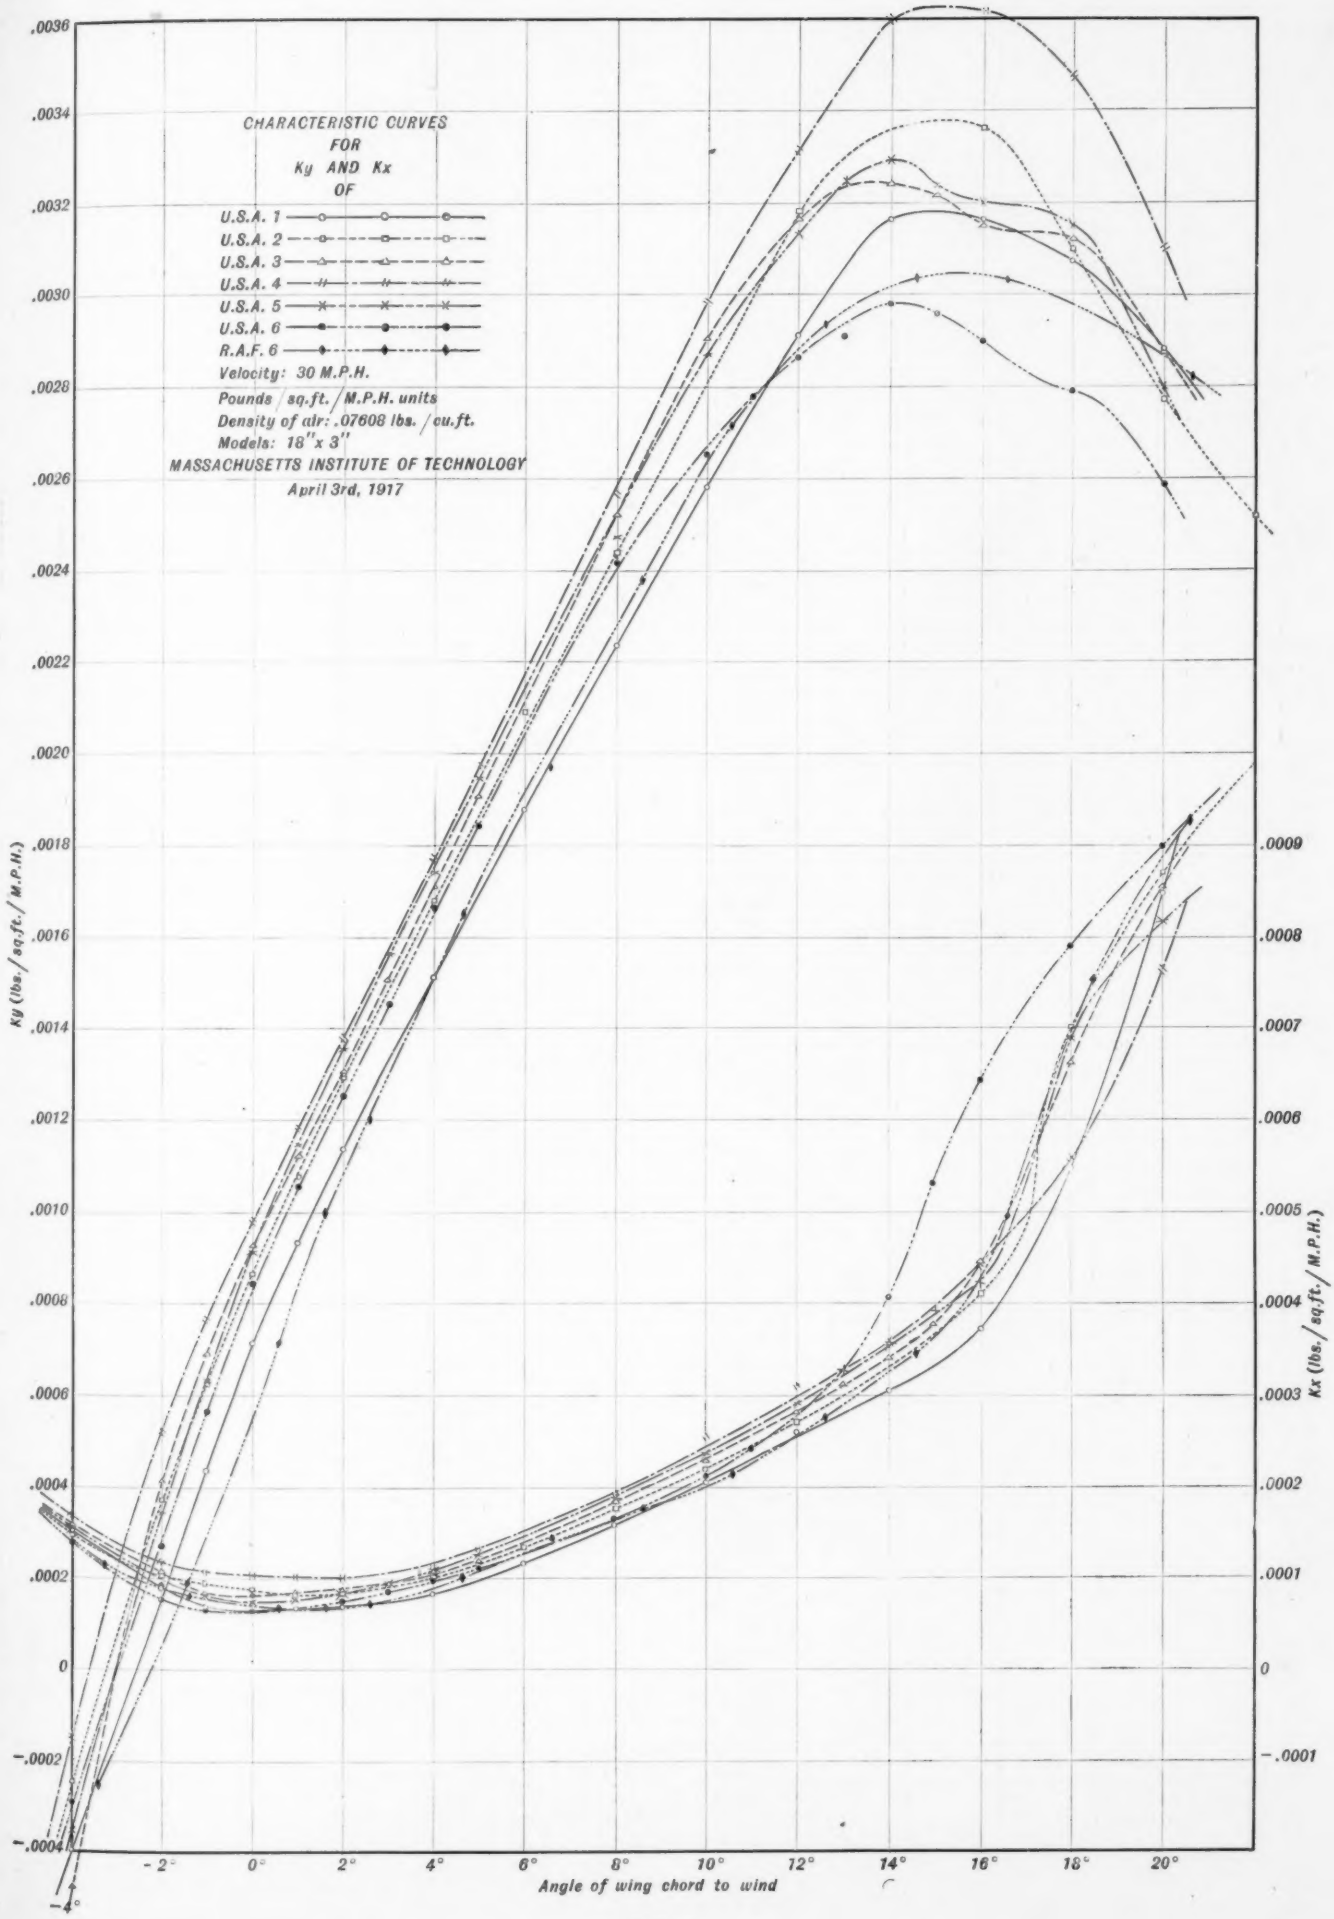
CHARACTERISTIC CURVES
FOR
Ky AND Kx
OF
U.S.A. 1
U.S.A. 2
U.S.A. 3
U.S.A. 4
U.S.A. 5
U.S.A. 6
R.A.F. 6
Velocity: 30 M.P.H.
Pounds / sq.ft. / M.P.H. units
Density of air: .07608 lbs. / cu.ft.
Models: 18" x 3"
MASSACHUSETTS INSTITUTE OF TECHNOLOGY
April 3rd, 1917
Ky (lbs. / sq.ft. / M.P.H.)
Kx (lbs. / sq.ft. / M.P.H.)
.0036
.0034
.0032
.0030
.0028
.0026
.0024
.0022
.0020
.0018
.0016
.0014
.0012
.0010
.0008
.0006
.0004
.0002
0
-.0002
-.0004
.0009
.0008
.0007
.0006
.0005
.0004
.0003
.0002
.0001
0
-.0001
-4°
- 2°
0°
2°
4°
6°
8°
10°
12°
14°
16°
18°
20°
Angle of wing chord to wind

FIG. 2

FIG. 3

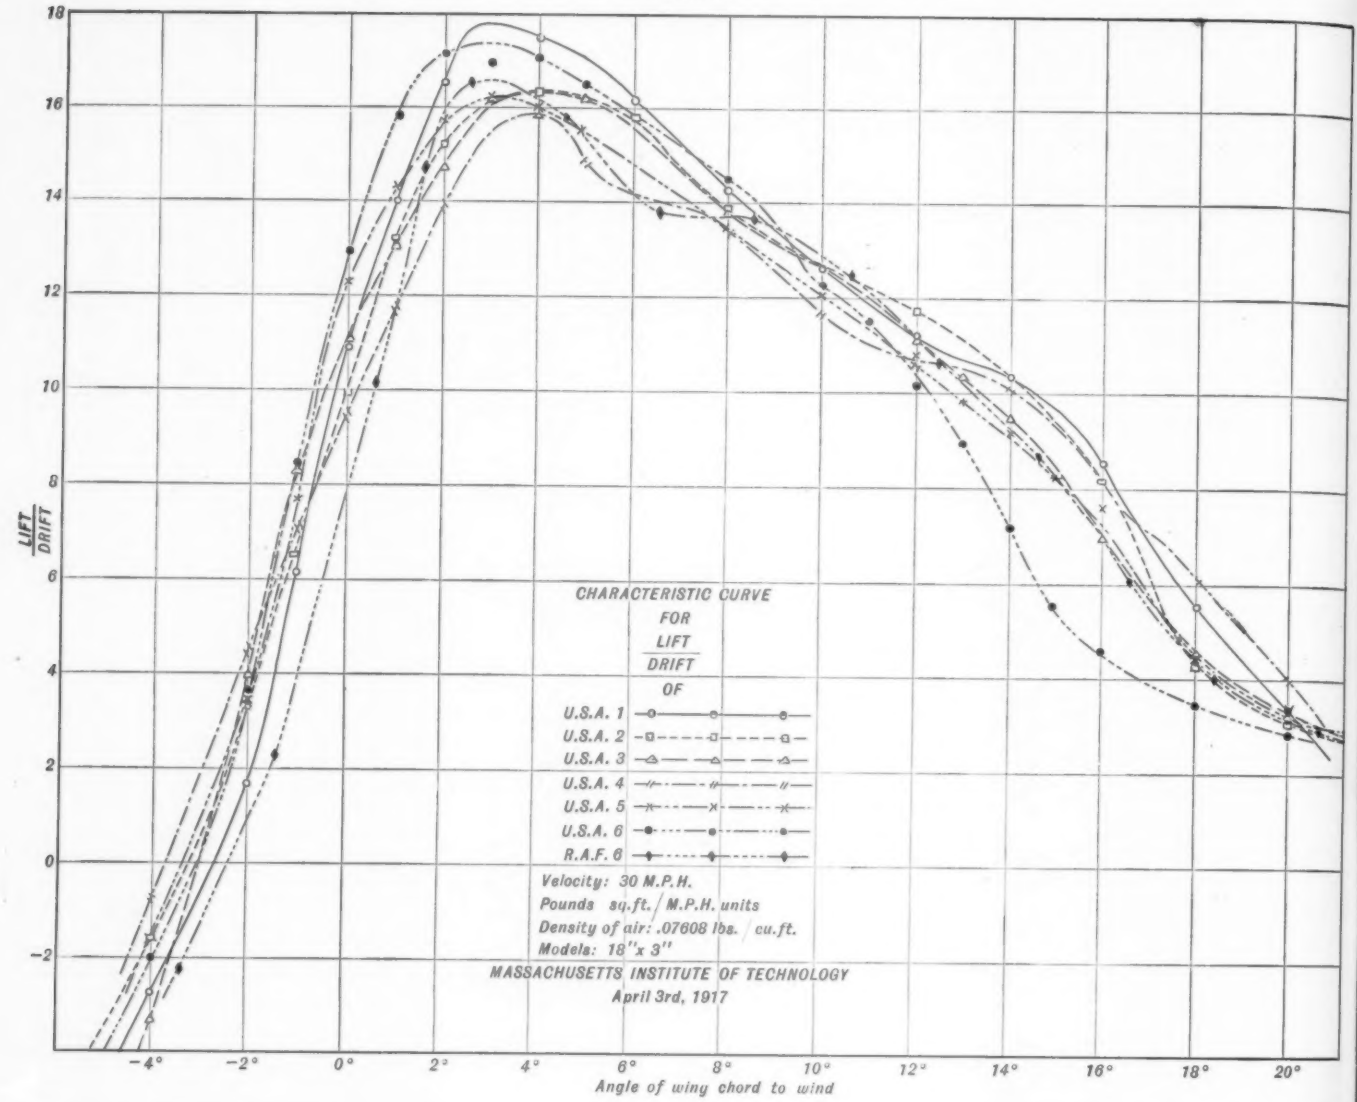
LIFT / DRIFT
18
16
14
12
10
8
6
4
2
0
-2
CHARACTERISTIC CURVE
FOR
LIFT
DRIFT
OF
U.S.A. 1
U.S.A. 2
U.S.A. 3
U.S.A. 4
U.S.A. 5
U.S.A. 6
R.A.F. 6
Velocity: 30 M.P.H.
Pounds sq.ft. / M.P.H. units
Density of air: .07608 lbs. / cu.ft.
Models: 18"x 3"
MASSACHUSETTS INSTITUTE OF TECHNOLOGY
April 3rd, 1917
-4° -2° 0° 2° 4° 6° 8° 10° 12° 14° 16° 18° 20°
Angle of wing chord to wind

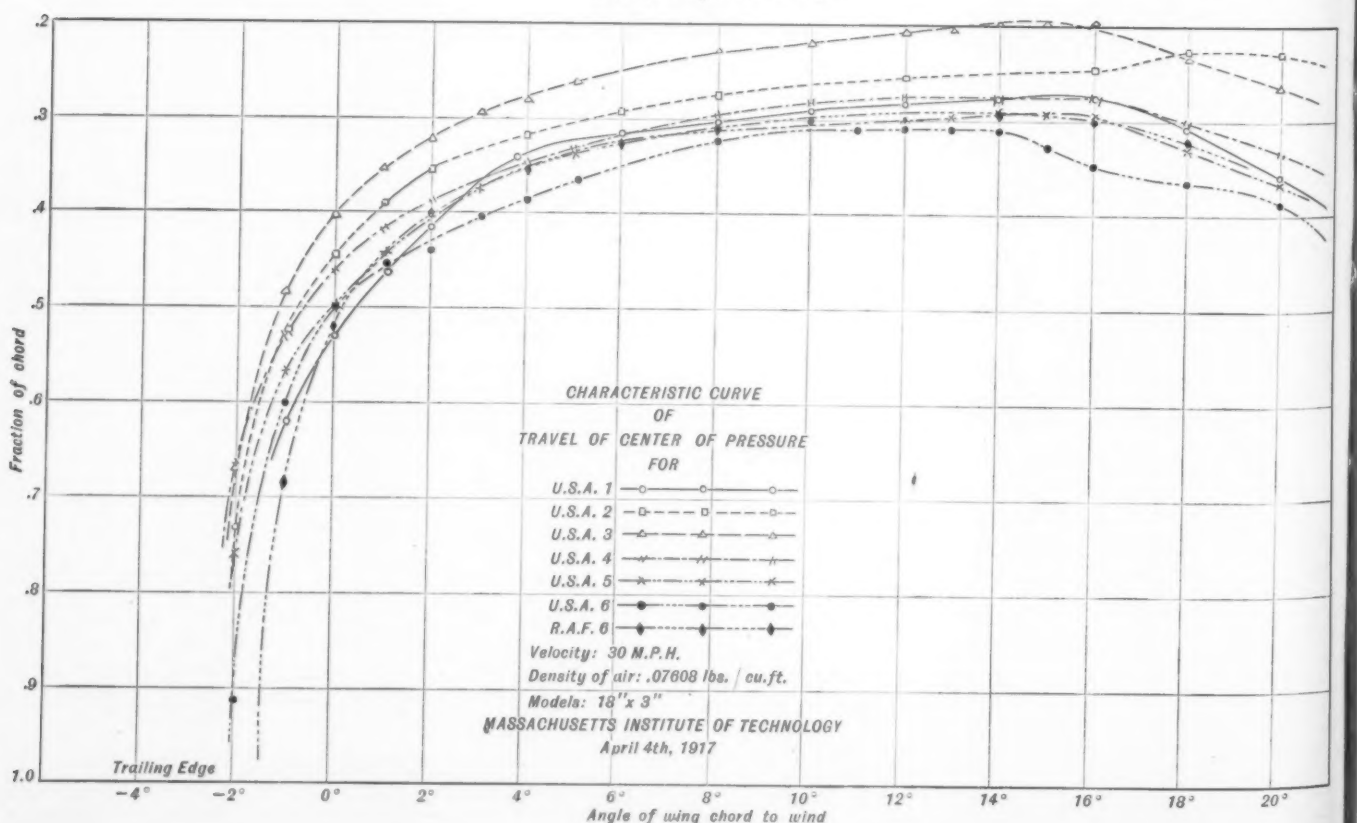
Fraction of chord
.2
.3
.4
.5
.6
.7
.8
.9
1.0
CHARACTERISTIC CURVE
OF
TRAVEL OF CENTER OF PRESSURE
FOR
U.S.A. 1
U.S.A. 2
U.S.A. 3
U.S.A. 4
U.S.A. 5
U.S.A. 6
R.A.F. 6
Velocity: 30 M.P.H.
Density of air: .07608 lbs. / cu.ft.
Models: 18"x 3"
MASSACHUSETTS INSTITUTE OF TECHNOLOGY
April 4th, 1917
Trailing Edge
-4° -2° 0° 2° 4° 6° 8° 10° 12° 14° 16° 18° 20°
Angle of wing chord to wind

FIG. 4

Course in Aerodynamics and Airplane Design*

By Alexander Klemin, A.C.G.I., B.Sc., S.M.

Instructor in Aeronautics, Massachusetts Institute of Technology, Member of the Aeronautical Society of Great Britain and Ireland,

and

T. H. Huff, S.B.

Instructor in Aeronautics, Massachusetts Institute of Technology

Copyright, 1917, by A. Klemin. All Rights Reserved.

PART II—SECTION 5

Materials in Airplane Construction

Within the limits of one section it is impossible to treat adequately all the data on materials required for airplane construction. The data included here will be sufficient for the purpose of our design, however, and a number of references are appended. For practical work, the designer must procure all necessary handbooks, make tests of his own special fittings, and generally collect his own data.

The Special Utility of Wood in Airplane Construction

It is the remarkable strength for its weight which makes wood so useful in airplane construction. If we compare spruce, weight per cubic foot 26 lb., tensile strength 9000 lb., with mild steel weighing 490 lb. per cubic foot with a tensile strength of 60,000 lb., the spruce will be $\frac{9000}{60{,}000} \times \frac{490}{26} = 2.9$ times as strong for the same weight.

The selection, mechanical properties and correct structural employment of timber are, however, inexhaustible subjects, and the following notes are the barest summary of the factors the designer must have in mind.

Weight of Wood

The weight of wood varies greatly for the same species and for portions of the same tree. Sapwood is heavier than heartwood, summerwood than springwood. Green timber naturally weighs more than dry timber, due to the presence of sap and moisture. The ultimate wood fiber of all species has a specific gravity of 1.6, so that no wood would float in water were it not for the buoyancy of the air present in the cells and walls.

The weight of wood is experimentally determined by subjecting thin discs to an oven temperature of 100° Cent. until they cease to lose weight by evaporation of moisture. But even with this provision, the results will be extremely variable, and the value usually assigned to a given species is simply the average of a large number of tests. Table 1, taken from a Bulletin of the Forestry Division, United States Department of Agriculture, will give values sufficiently accurate for design.

Weight is a good indication of the strength of wood, provided the amount of moisture contained is known. As a general rule, we may say that a comparison of two woods, each containing the same percentage of moisture, will show the heavier to be the stronger; in fact, the strength will be very nearly proportional to the weight.

TABLE 1

Specific Gravity and Weights of Woods

Dry woods	Wt. per cu. ft. lb.	Specific gravity
Ash, American white	38.	.610
Balsa	6.5	.104
Boxwood	60.	.960
Cherry	42.	.672
Chestnut	41.	.660
Cork	15.	.250
Elm	35.	.560
Ebony	76.1	1.220
Hemlock	25.	.400
Hickory	53.	.850
Lignum-vitæ	83.	1.330
Mahogany, Spanish	53.	.850
Mahogany, Honduras	35.	.560
Maple	49.	.790
Oak, live	59.3	.950
Oak, white	48.	.770
Oak, red	40.	.640
Pine, white	25.	.400
Pine, yellow	34.3	.550
Pine, southern	45.	.720
Sycamore	37.	.590
Spruce	25.	.400
Walnut	38.	.610

Factors in the Mechanical Properties of Woods

The strength properties of wood depend on (1) correct identification of species and variety; (2) age and rate of growth; (3) position of test specimens in the tree; (4) moisture content; (5) relative freedom from defects, such as knots, etc.

Tensile Strength

Tensile tests are difficult because tests cannot be devised that do not involve either shear along the grain or compression across the grain. It is for the same reasons that wood may be unsuitable in tension, though it is apparently strong under such a stress.

Failure in tension along the grain involves principally the resistance offered by the wood elements to being torn apart transversely or obliquely. The strands of wood elements are practically never pulled apart by failure of the union between adjacent strands or fibers.

Cross grain is prejudicial to tensile strength and rays, owing to their transverse position with respect to a load applied along the grain, and small resistance to tension in a direction normal to the direction of their fibers greatly weaken the timber. Knots weaken wood subjected to longitudinal tension.

Compressive Strength

Individual fibers act as so many hollow columns bound firmly together, and failure involves either buckling or bending of the individual fibers or bundles of elements which finally come to act almost independently.

Compressive strength depends on a number of factors: (1) density; (2) strength of union between individual fibers as affected by moisture content; (3) stiffness of wood fibers (again largely a matter of moisture content); (4) continuity of the course of longitudinal strands in a direction parallel to axis of the piece. Woods in which separate elements are closely interlaced and bound together will be stronger than woods of opposite character.

The strongest woods in compression with the grain are, roughly, in the following classes:

(1) The dense and tough hickory, birch, hard maple, etc.; (2) oak, elm, ash; (3) spruce, pine and fir.

Crushing Across the Grain

Crushing strength across the grain is dependent practically entirely upon the density of the wood. Crushing strength across the grain is, therefore, least for the lightest, most porous woods, and greatest for heaviest and densest woods.

Compressive strength across the grain is to compressive strength along the grain as 13 to 14 per cent for white pine, cedar, cypress and spruce, 15 to 16 per cent for the various grades of hard pine, 18 to 26 per cent for elms, 21 to 26 per cent for ash, 22 to 26 per cent for oaks, 23 to 31 per cent for hickories.

Strength in Bending

In considering the strength of a wooden beam in bending, several difficulties occur. Longitudinal shear is very important. A wing spar may be amply strong in bending, and yet if

* This Course commenced in the August 1, 1916, issue of AVIATION AND AERONAUTICAL ENGINEERING will be completed in 24 issues.

highly channeled out fail by longitudinal shear. The tensile fiber strength of wood is much in excess of the compressive stress, but even if the compressive fiber stress of wood is employed in the formula $f = \frac{M_y}{I}$, it is no true criterion. If this formula is employed for strength computations in bending, it is assumed that the material is still behaving elastically up to actual failure, and therefore that the fiber stress is still directly proportional to the distance of the fiber from the neutral axis. As a matter of fact, the elastic limit of the material may have long been passed when the breaking load is reached, the neutral axis may have shifted, and the extreme fiber may be no longer proportional to the bending. Therefore, in stress calculations for wing spars, these considerations should be applied, making use of the modulus of rupture—for which values are given in Table 2—deduced from actual bending tests, which are far more trustworthy guides.

Knots

Knots originate in the timber cut from the stem or branches of a tree because of the encasement of a limb, either living or dead, by the successive animal layers of wood. Most limbs originate at the pith of the stem, and the knots found deep in a log are therefore small, increasing in size toward the bark. So long as the limb is growing, its layers of wood are a continuation of those of the stem. But a majority of the limbs die after a time, and if a portion of a dead limb is subsequently encased by the growing stem, there will be no intimate connection between the new stem wood and the dead wood of the limb, and a board so cut as to intercept this portion of the log will contain a loose knot. A board cut from the log at such a depth that the limb is intercepted at a point where it was encased while still living will contain a sound knot, unless the knot has rotted, become badly checked, or contains a large pith cavity.

A sound knot is usually harder than the surrounding wood, and in coniferous woods is apt to be very resinous. On this account it may constitute a defect because of its non-retentivity of paint or varnish. Otherwise it constitutes a defect only on account of the disturbance to the grain and difficulty caused in working, or in the event of its occurrence on the under side of a timber used as a beam, a weak point exists, owing to its small resistance to tensile stress. A knot constitutes an impediment to the splitting of timber, since the fibers of the stem wood above a limb bend aside and pass around the limb, while the fibers below run continuously into the limb. Thus it often happens that a cleft started above a limb will never run into a knot, but one started below is very apt to do so.

The Effect of Moisture on Strength of Wood

Loss of moisture does not affect the strength of wood in any way, until the total moisture content has been reduced below the critical percentage, which represents the fiber-saturation period. Beyond this point, progressive loss of moisture affects the strength very considerably. Thus the strength of green wood is only 50 to 60 per cent of normal air-dry conditions (12 per cent moisture), while the strength of kiln-dry wood exceeds the strength of air-dry woods by some 50 to 70 per cent.

Time Factor in Tests of Timber

Timber differs from most other materials in that small variations in the rate of application of load have a more pronounced effect upon the strength and stiffness shown by a specimen under test. If a timber-compression block or beam is loaded rapidly, it will appear to have a higher elastic limit and ultimate strength, and will also appear to be stiffer, than it will if loaded less rapidly. This is due to the fact that the deformation lags far behind the load, and if any load is permitted to remain upon a specimen for a time the deformation increases, the amount of increase becoming greater for heavier loads. Actual failure appears to be consequent upon the attainment of a certain limiting amount of deformation or strain, rather than a limiting load or stress.

Difficulties of Wood Construction in Airplanes

The comparative values of Table 2 demand the most careful study. A certain type of timber may be most suitable for the direct stress to which it is subjected, yet fail completely under certain indirect stresses, either inherent in the construction or due to faulty design. For example, at the hinging of a wing spar to the body, if the bolts are not correctly placed, they may shear out the wood. These points will be considered in detail in the design, but enough has been said to show the value of studying not only the direct stresses on a piece of timber in a machine, but also the indirect stresses producing crushing across the grain, shear, etc.

Strength Values for Timber

In no material are such conflicting values given by various authorities as for timber. The size of the specimen under test, the dryness, the method of applying the load, and its previous history, all tend to introduce discrepancies. Until the Bureau of Standards, or some other testing laboratory, has gone thoroughly into the question, all the values employed by airplane constructors will be open to suspicion. Table 2 is a summary of information taken from various sources. This table is not unimpeachable, but it approximates closely values used in current practice. In airplane design, fiber stress is still taken as a criterion, without due consideration of the modulus of rupture.

TABLE 2

Material.	Tensile strength with grain.	Tensile strength across grain.	Compressive strength with grain.	Compressive strength perpendicular to grain (fiber stress at elastic limit only).	Shearing strength parallel to grain.	Hardness load required to embed a 0.444 in. ball to half its diameter.	Modulus of rupture in static bending.	Modulus of elasticity.
Ash.....	12,000	1,600	9,000	1,300	1,500	56.5	15,660	1,600,000
Balsa.....	11,000	1,600	1,200	..	..	60–70	..	..
Beech.....	11,000	1,600	8,600	..	1,200	..	10,000	1,550,000
Birch.....	15,000	1,800	3,500	..	1,050	..	11,700	1,500,000
Cedar.....	10,800	700	5,700	..	..	..	7,400	600,000
Elm.....	10,000	..	7,000	..	..	..	8,800	1,000,000
Hickory...	15,000	2,200	11,000	944	1,500	..	15,000	1,600,000
Mahogany.	16,000	..	8,200	..	..	..	11,000	1,250,000
Maple.....	11,150	1,500	7,150	606	1,130	..	12,000	1,600,000
Oak.....	15,000	2,000	7,000	..	1,215	1,139	10,600	1,900,000
Pine,yellow	13,000	1,100	5,400	342	640	310	4,760	1,600,000
Pine, white	10,000	1,100	5,000	314	640	304	5,000	1,100,000
Spruce.....	9,000	600	6,500	400	500	272	9,200	1,800,000

Acknowledgement is due Prof. W. H. Keith for collaboration on brief notes on timber.

Wires and Cables

The following terms are in common use: (1) "Solid wire stay" or "aviation wire" of one wire of suitable diameter; (2) "strand stay," consisting of either 7 or 14 wires stranded together and known to the trade as "aviation strand"; (3) "cord" or "rope stay," consisting of 7 strands twisted together, forming a rope, the strands being either 7 wires or 19 wires; (4) "flexible cord," composed of six strands of seven wires, with a center of either cotton or wire, as ordered. The cord with the cotton center is considerably more pliable than that with the wire center.

Vanadium steels and other special steels have not as yet become established as desirable wire steels, and carefully made high-grade carbon steel is at present most largely employed in the manufacture of wires and cables.

Properties of Metals

Only the briefest outline can be given of the metals that are commonly employed in airplane construction. To enter into any adequate discussion of this branch of the work would require a book in itself. The constructor must keep constantly before him some standard book on this subject and at the same time resort to strength of material and part tests whenever new combinations are to be employed in his design.

The following table of weight and melting points for various metals may be of service:

Metal.	Weight per cu. in.	Weight per cu. ft.	Specific Gravity.	Melting point Fahr. °.
Aluminum	.096	166	2.66	1,215
Antimony	.242	418	6.70	786
Bismuth	.350	607	9.74	516
Brass, cast	.292	504	8.10	1,635
Brass, rolled	.303	524	8.40	....
Bronze, gunmetal	.305	529	8.50	1,800
Copper, cast	.314	542	8.70	1,980
Copper, cold	.321	555	8.90	....
Duralumin	.103	178	2.85	(approx.)1,300
Gold, 24 carat	.694	1,204	19.26	1,950
Iron, cast	.260	450	7.21	2,012
Iron, wrought	.278	480	7.70	2,912
Lead, cast	.410	710	11.38	621
Mercury 60° Fahr.	.489	846	13.58	....
Monel metal	.320	553	8.85	2,480
Platinum	.779	1,342	21.50	3,236
Silver	.378	655	10.50	1,762
Steel, rolled	.283	490	7.85	2,552
Tin, cast	.266	459	7.35	450
Zinc, cast	.248	429	6.88	786

TABLE 3

Strength and Weights for Wire and Cables

SOLID WIRE

Roebling Solid Wire

Diameter of cord, Inches	Breaking strength of cord, Pounds	Approximate weight per 100 ft., Pounds
1/16	400	.73
5/69	480	.83
3/32	780	1.30
7/64	830	1.50
1/8	1,150	2.20
5/32	2,200	4.20
3/16	2,750	5.30
7/32	4,000	7.43
1/4	5,000	4.50
5/16	7,900	15.00

AVIATOR WIRE STRAND

Roebling's 19 wire galvanized

1/32 (7 wire)	185	0.30
1/16	500	0.78
5/64	780	1.21
3/32	1,100	1.75
7/64	1,600	2.60
1/18	2,000	2.88
5/32	2,800	4.44
3/16	4,200	6.47
7/32	5,600	9.50
1/4	7,000	12.00
9/32	8,000	14.56
5/16	9,800	17.71
11/32	12,500	22.53
3/8	14,400	26.45

American Steel and Wire Co. galvanized (19 wire) airplane strand

1/32 (7 wires)	125	.23
1/16	500	.89
3/32	1,100	1.70
1/8	2,000	3.3
5/32	3,000	5.1

AVIATOR CORD

Roebling's 7 by 19 heavily tinned

1/8	2,000	2.88
5/32	2,800	4.44
3/16	4,200	6.47
7/32	5,600	9.50
1/4	7,000	12.00
9/32	8,000	14.56
5/16	9,800	17.71
11/32	12,500	22.53
3/8	14,400	26.45

FLEXIBLE CORD

Roebling extra flexible aviator cord, 6 x 7 cotton center

5/16	9,200	16.70
1/4	5,800	10.50
7/32	4,600	8.30
3/16	3,200	5.80
5/32	2,600	4.67
1/8	1,350	2.45
7/64	970	1.75
3/32	920	1.45
5.64	550	.93
1/16	485	.81

American Steel and Wire Co. galvanized or turned flexible cord

3/16 (19 x 7)	2,600	5.52
5/12 (19 x 7)	1,800	3.85
1/8 (19 x 3)	1,150	2.45
3/32 (12 x 3)	725	1.55

Wire, Strand or Cord

Roebling's report does not settle the question as to which is a correct selection. A comparative table shows the progressive decrease in strength.

Material.	Diameter.	Strength of material.	Strength of stay
Wire	3/16	5,500	5,100
Strand	3/16	4,600	4,100
7 by 19 cord	3/16	4,200	3,500

A stranded or cord stay has about 20 per cent more aerodynamical resistance than a solid wire of about the same diameter. There appears to be a slight advantage in favor of solid wire as regards strength of stay. On the other hand, the strand stay is one and a third times more elastic, the cord one and three-quarter times more elastic than the solid wire. In American practice all three types of stays appear. No doubt the use of strand or cord is justified by the extra elastic stretch and flexibility.

Exact data on the fatigue values of the three materials is not available, but it is well known that strand or cord will stand up much better to vibration than a wire. Also in a continuous beam structure such as that of a wing, there may be deflections of unknown magnitude, in which case the more elastic cable will be somewhat safer. On the other hand an exposed cable is liable to damage. A single small wire of one strand may be damaged and lead to the eventual destruction of the whole cable. In the covered in body a cable is not likely to be damaged. The problem is by no means settled yet, and only comparative experience in actual flight and further experimentation can give a definite solution.

Turnbuckles

The breaking strength of turnbuckles made of precisely the same material will vary enormously with every type of construction, and the makers' catalog or data sheet has to be consulted for every special case. In Figs. 1 and 2 are shown two representative types, the Curtiss and the National, Burgess, Meyer, Binet types. The weights and strength values are fairly representative of what can be obtained from this important brand of airplane material. In Table 4 are given results of tests on some specimens of the Standard Screw Co. of Pennsylvania:

TABLE 4

Standard Screw Co. Turnbuckles

Manufacturer number.	Mean breaking load.	Mean breaking load from test.	Initial shank area per sq. in.	Weight in lb Long, barrel male
326	2,150	2,432	.01864	.122
327	2,850	3,496	.0260	.167
328	3,500	4,605	.0350	.232
329	5,000	6,545	.0515	.275
330	840	9,530	.0794	.411

Mean tensile strength of shank, 128.610 lb. per sq. in. Material—shank, 3½ per cent. nickel steel, heat treated; barrel, robin bronze. Turnbuckles are made in short and long male and female ends.

Strength of Steel—Lbs. per Sq. Inch

	Tension Ultimate	yield point.	Compression Ultimate	yield point.	Shearing Ultimate	yield point.
0.05% C for rivets	45,000	22,000	70,000	40,000	45,000	22,000
0.10% C boiler plate	55,000	30,000	95,000	65,000	50,000	28,000
0.25% C structural	65,000	34,000	110,000	85,000	55,000	32,000
0.40% C rails	70,000	45,000	120,000	90,000	60,000	35,000
0.90% C machinery	90,000	70,000*	140,000	110,000*	70,000	*45,000
1.00 to 2.00% tool	150,000	none	200,000	none	120,000	none

*When well annealed.

	Modulus of elasticity. Direct	Shearing	
0.05% C	26,000,000	13,000,000	
0.10% C	28,000,000	13,500,000	
0.25% C	30,000,000	14,000,000	
0.40% C	30,000,000	14,000,000	
0.90% C	32,000,000	14,500,000	When well annealed.
1.00 to 2.00% C	35,000,000	16,000,000	When hardened.

	Modulus of Rupture
For flat plates	1.0 (t. s.)
For squares	1.2 (t. s.)
For high rectangles	1.5 (t. s.)
For rounds and diamonds	1.8 (t. s.)

Strength of Steel Castings—Well Annealed—Lbs. per Square Inch

Small Castings

Tension Ultimate yield point		Compression Ultimate yield point		Shearing Ultimate yield point	
60,000	30,000	80,000	45,000	45,000	25,000

Modulus of elasticity (direct) 29,000,000
Modulus of elasticity (shearing) 13,000,000
Modulus of rupture in same ratios as above.

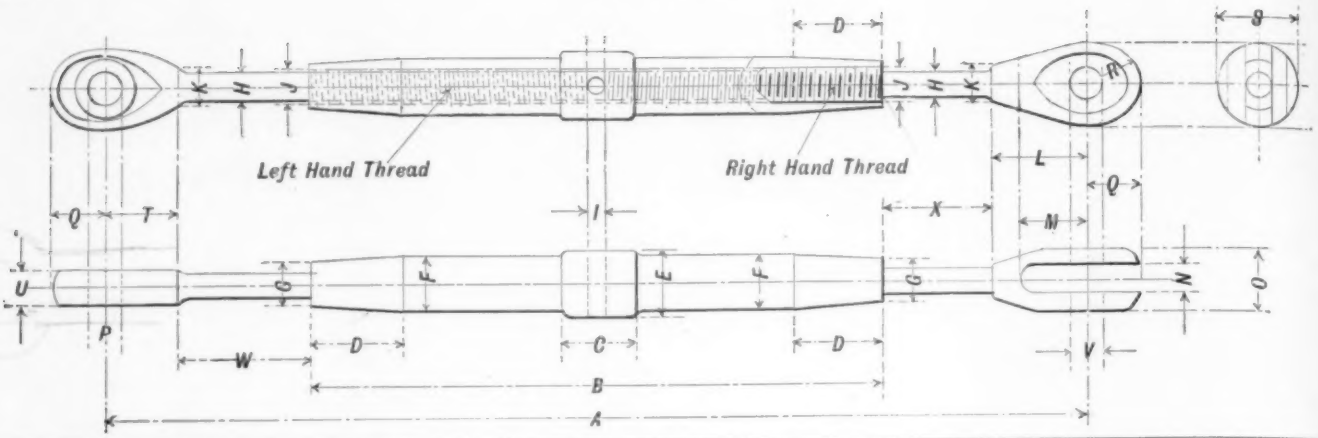

Curtiss No.	No.	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Th'ds Per Inch	Br'k'g Stress	Cable	Weight
Special		7¾	4	½	7/16	5/8	7/16	11/32	.320	7/16	3/8	3/8	7/16	7/16	11/32	11/32	7/16	½	7/16	11/32	5/8	11/32	7/16	1 1/16	1 1/16	24	8846	1/4 in. Cable	...
3	326	8	4	7/16	7/16	3/8	11/32	7/32	.159	1/4	.203	1/4	5/8	1/2	.110	7/16	7/16	11/32	7/16	1/2	7/16	7/16	7/16	1 1/2	1 11/32	30	2183	3/16	...
4	327	7 11/32	4	½	9/16	11/32	11/32	7/16	.187	7/32	.234	9/32	11/32	½	11/32	7/16	1/4	11/32	7/16	5/8	½	7/16	1/4	1 3/16	1 11/32	28	3037	1/8 in. Cable	...
5	328	7 11/32	4	½	11/32	½	7/16	3/8	.215	7/32	.265	9/32	11/32	9/16	11/32	1/2	1/4	11/32	1/4	11/32	½	1/4	1/4	1 7/16	1 11/32	26	3993	5/32	...
6	329	7 11/32	4	½	3/4	11/32	11/32	7/16	.258	9/32	5/16	3/8	7/16	5/8	11/32	9/16	5/16	11/32	9/32	3/4	9/16	9/32	9/32	1 7/16	1 7/16	24	5750	3/16	...
✓	326-S	3 11/32	2	7/16	7/16	3/8	11/32	7/32	.159	1/4	.203	1/4	5/8	1/2	.110	7/16	7/16	11/32	7/16	1/2	7/16	7/16	5/16	7/16	11/32	30	2183	10GA Wire	...
	327-S	4 7/16	2 1/16	½	5/8	11/32	11/32	7/16	.187	7/32	.234	9/32	11/32	5/8	.110	11/32	1/4	11/32	7/16	5/8	½	9/32	1/4	7/16	11/32	28	3037	8GA Wire	...

Material:—Mang. Bronze and 55-Ton Steel

FIG. 1.— CURTISS TURNBUCKLES.

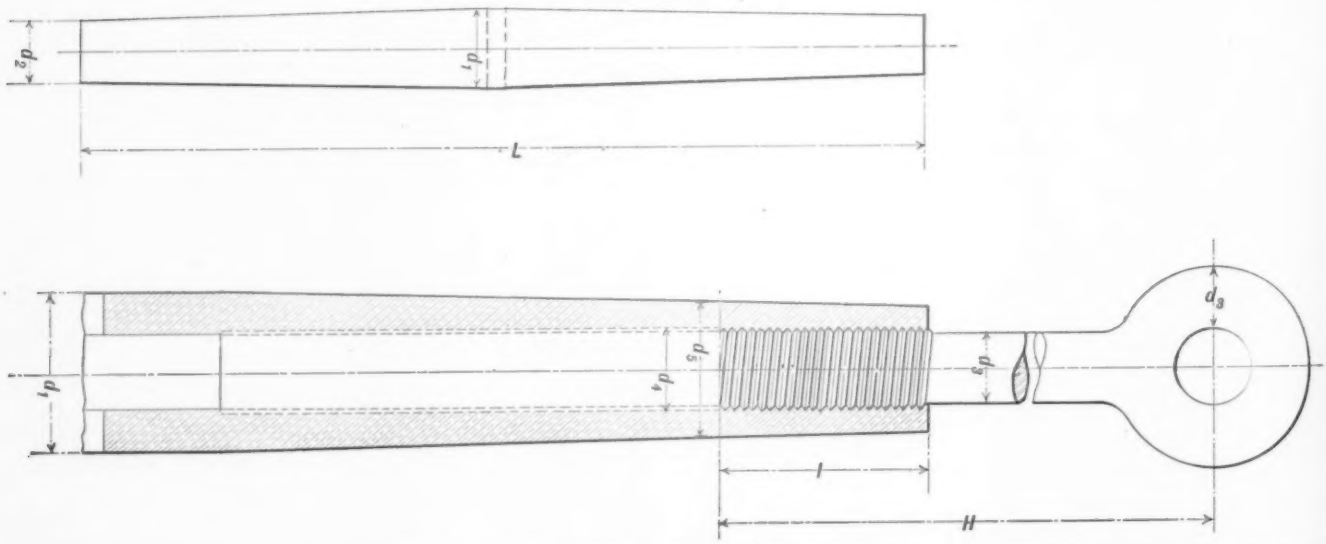

SPECIMEN	L	H	d_1	d_2	d_3	d_4	d_5	l	Weight lbs.	Estimated Load, Pounds	Remarks
National No. 324	2.35	1.30	.28	.23	.11	.15	.20	.45	.039	1250	Failure in shank.
National No. 327	2.50	2.50	.40	.32	.19	.23	.35	.60	.161	2200	Yield in barrel.
National No. 328	5.00	2.75	.48	.37	.20	.27	.40	.65	.229	2800	Yield in barrel.
National No. 328	5.00	2.80	.46	.38	.22	.27	.40	.70	.242	2200	Low value due to d_4
National No. 329	6.00	3.25	.54	.44	.23	.31	.47	.85	.361	4000	Yield in barrel.
A. J. Meyer No. 3	2.35	1.30	.28	.21	.11	.15	.19	.45	.037	1200	Yield in barrel. Above average.
A. J. Meyer No. 4	3.00	1.75	.32	.20	.14	.18	.28	.45	.0682	1500	Yield in barrel.
A. J. Meyer No. 6	4.50	2.50	.42	.32	.19	.23	.35	.55	.161	2200	Yield in barrel.
A. J. Meyer	6.00	....	...	...	.20	...	...	...	.172	2800	Failure in shank.
A. J. Meyer	4.80	2.70	.62	.51	.30	.33	.57	.80	.506	7000	Yield in barrel.

Estimated load based upon average strength at yield point of barrel 41,000 lb. per sq. in. Average tensile strength barrel, 60,000 lb. per sq. in. Average tensile strength of shank 130,000 lb. per sq. in.

FIG. 2:—MEYER, NATIONAL, BURGESS AND BINET TURNBUCKLES.

Large Castings

Tension Ultimate yield point		Compression Ultimate yield point		Shearing Ultimate yield point	
40,000	20,000	70,000	40,000	40,000	20,000

Modulus of elasticity (direct)..... 28,000,000
Modulus of elasticity (shearing)..... 13,000,000
Modulus of rupture in same ratios as above.
Steel Castings with Vanadium show about 20 per cent increase over the above values.

Strength of Special Steel Alloys—Lbs. per Square Inch

	Tensile strength.			Yield point
Manganese	Up to	140,000	up to	90,000
Nickel	"	140,000	"	90,000
Chrome Vanadium	"	200,000	"	175,000
Chrome Nickel	"	140,000	"	100,000
Tungsten	"	170,000	"	150,000
Chrome Tungsten	"	185,000	"	160,000

Strength of Copper, Aluminum and Various Alloys—Lbs. per Square Inch

Cast Copper

Tension	22,000
Compression	45,000
Shearing	18,000
Modulus of elasticity (direct)	12,000,000
Modulus of elasticity (shearing)	8,000,000
Modulus of rupture (rectangular sections)	35,000

Cold Rolled or Hammered Plates

Tension	32,000
Compression	60,000
Shearing	28,000

Cold Drawn Wire

Tension	50,000 to 60,000
Shearing	40,000

Modulus of elasticity of cold worked copper 17,000,000. Copper has no well defined yield point.

Cast Aluminum

Tension	14,000
Compression	25,000
Shearing	10,000

Cold Worked Aluminum Plate and Wire

Tension	24,000 (Plate)
Tension	40,000 (Wire)
Modulus of elasticity (direct)	8,000,000

Aluminum has no well defined yield point.

Duralumin

Tension, 33,000; Compression, 68,000; Modulus elasticity, 10,000,000.

High brass	Tension	35,000
Low brass	"	28,000
Composition	"	30,000
Bronze	"	30,000 to 75,000 varying with composition.
Phosphor bronze	"	40,000 to 130,000, varying with form.
Tobin bronze	"	80,000, yield point 50,000 hot rolled.
Tobin bronze	"	100,000, yield point, 70,000 cold rolled.
Delta metal	"	45,000 Cast. Tension, 70,000 cold rolled.
Manganese bronze	"	70,000 lbs./sq. in. Compression, 120,000 lbs./sq. in.
Monel metal (hot rolled)	Tension	(ultimate) 88,150 lbs./sq. in. (yield, 58,000 lbs./sq. in. elongation in 2 inch, 38 per cent.

The steel at present in common use among manufacturers is the mild sheet steel generally designated as cold rolled steel (C.R.S.). Whether its easy working qualities or its cheapness and easy supply has brought about this poor choice, is hard to judge. It is a relief to find that the constructors and the Government are endeavoring to do away with this most unreliable and inefficient of materials. Instances have only too often been brought to our attention when upon the completion of some small stamped fitting, the apparently solid metal is found to be of two distinct layers of thinner metal held together only at a few points. It is not well, however, to jump too quickly to the other extreme and attempt to use the very high strength alloys—requiring expert working and heat treatment. Companies to-day are, with a few exceptions, not in a position to undertake this added responsibility and the forcing of such delicate work upon inexperienced hands would be as dangerous as the present methods.

The following table outlines the general influence of chemical composition of the physical properties of steel:

	Tensile strength.	Elastic ratio.	Ductility.	Hardness	Hardening power	Brittleness.	Resistance to shock.	Resistance to vibratory stresses.	Forgeability, absence of red-shortness.	Weldability.
Carbon	(1)	+	−	+	(2)	+	(12)	+	−	−
Phosphorus	(13)	...	(3)	0	...	(4)	−	−	0	...
Manganese	+	−	...	+	...	...	...	...	(5)	...
Sulphur	...	...	...	0	...	...	...	...	−	−
Silicon	...	...	(6)	0	...	...	...	...	(7)	...
Aluminum	...	...	(8)	0	...	...	...	...	...	−
Vanadium	+	+	(9)	...	...	...	+	+	...	...
Chromium	+	+	...	+	...	...	+	+	...	...
Molybdenum	+	...	...	+	...	...	...	...	...	...
Tungsten	+	+	...	+	...	...	...	...	...	...
Nickel	+	+	(9)	+	...	...	+	+	...	(10)
Copper	...	...	...	0	...	...	...	...	(11)	...
Oxygen	...	...	...	...	...	+	...	...	...	...
Nitrogen	...	...	...	...	...	+	...	...	...	...

(1) + up to 1 per cent., then −; (2) + up to 0.85 per cent.; (3) 0 up to 0.1 per cent., then −; (4) + over 0.1 per cent.; (5) + up to 0.5 per cent.; (6) — above 1.5 per cent.; (7) — over 6 per cent.; (8) — over 0.85 per cent.; (9) — slightly; (10) — over 1 per cent.; (11) — from 2 to 7 per cent.; (12) + up to 0.3 per cent., then −; (13) + up to 0.1 per cent., then −.

The above table, while very comprehensive, should not be considered as final.

The matter of weldability of the chrome vanadium and nickel steel is indefinite, very reliable information showing that 3¼ per cent. nickel steels give better welds than the chromium steel.

The S.A.E. Specification No. 3130 for a low carbon chrome-nickel steel, or Specification No. 2330 for 3½ nickel steel would seem to meet the requirements of the manufacturers as well as the Army Specifications of the S.A.E. No. 6130 chrome-vanadium, eliminating at the same time, the great danger of segregation due to faulty heat-treatment.

Heat treatment and its influence cannot be gone into; it requires very careful study and infinite care in application.

Strength and Weight of Mild Steel Rivets and Pins

Diameter, inches. "d."	Strength in Pounds Single Shear.	Double Shear.	Crushing ÷ t.
1/8	1,000	1,600	1,200
3/16	1,600	3,000	1,800
1/4	2,750	4,500	2,400
5/16	3,900	7,000	2,800
3/8	5,000	9,800	3,600
1/2	9,000	17,800	4,800
3/4	20,000	40,000	7,200
1	35,500	71,000	9,600

The above values are based upon a shearing strength in pounds per square inch $fs = 45{,}000$ and a crushing strength, $f_c = 96{,}000$.

$$P_s = f_s \frac{\pi d^2}{4} \text{ for single shear.}$$

$P_c = f_c dxt$, for crushing, where t, the thickness of the plate or other piece held by the rivet or pin.

The values for crushing have been worked out for a plate 1 inch thick, therefore the crushing strength for various thicknesses of plate may be computed by multiplying the above values by "t" in inches.

If the crushing strength of the rivet is greater than its shearing strength the design should be based upon the smaller result.

In case the bolt is subjected to a load other than tension, the strength should be based upon the corresponding form of loading. When bolts and pins are used in turnbuckle fittings and wire connections they are usually subjected to a form of bending and should be calculated as a beam round cross section loaded at the center.

$f = \frac{M_y}{I}$, where f = modulus of rupture, M = bending moment due to load generally considered concentrated at the center, Y = distance from neutral axis to most strained fiber, in this case $\frac{1}{2} D$; I = moment of inertia of cross section.

In figuring bolts that pierce wooded members the failure of the wood should be considered first, since in this type of connection rupture is most often caused by the fastening pulling out or loosening due to the wood crushing in front of the bolts. The crushing load may be computed from the formula $P = f_c \times L \times D$. Where P = crushing load, f_c = crushing

strength of wood, L = length of bolt in wood, D = normal bolt diameter.

United States Standard Bolts and Nuts

Nominal dia. D, in.	Eff. dia. root of thread d, in.	Shank area, sq. in.	Eff. area root of thread A, sq. in.	Threads per in.	Short dia. of hex. and sq. nuts, in.	App. dia. across corners hex. nuts, in.	App. dia. across corners sq. nuts, in.
1/4	0.185	0.049	0.027	20	1/4	0.578	0.707
5/16	0.240	0.077	0.045	18	19/32	0.686	0.840
3/8	0.294	0.110	0.068	16	11/16	0.794	0.972
7/16	0.345	0.150	0.093	14	25/32	0.902	1.105
1/2	0.400	0.196	0.126	13	7/8	1.010	1.237
9/16	0.454	0.249	0.161	12	31/32	1.119	1.371
5/8	0.507	0.307	0.202	11	1- 1/16	1.227	1.503
3/4	0.620	0.442	0.302	10	1- 1/4	1.443	1.768
7/8	0.731	0.601	0.420	9	1- 7/16	1.661	2.033
1	0.837	0.785	0.550	8	1- 5/8	1.876	2.298
1-1/8	0.940	0.994	0.694	7	1-13/16	2.093	2.564
1-1/4	1.065	1.227	0.891	7	2	2.310	2.828
1-3/8	1.160	1.485	1.057	6	2- 3/16	2.527	3.094
1-1/2	1.284	1.767	1.295	6	2- 3/8	2.743	3.358
1-5/8	1.383	2.074	1.515	5-1/2	2- 9/16	2.959	3.624
1-3/4	1.431	2.405	1.746	5	2- 3/4	3.176	3.889
1-7/8	1.616	2.761	2.051	5	2-15/16	3.393	4.156

NOTE:—Depth of nut = nominal diameter.
Depth of head = one-half short diam. of hex. and sq. nuts.

The strength of United States standard bolts may be based upon the formula $P = A \times f_t$. Where P = the strength of the bolt, f_t = tensile fiber stress per square inch = 65,000, A = effective area at root of thread. Solving for D the nominal diameter $D = 1.24 \sqrt{\frac{P}{f_t}} + .088$.

Airplane Fabrics

The general requirements and tests for airplane fabrics are well summarized by the following table:

(1) Fabric should present reasonably great resistance to flame.
(2) It should be proof against the action of salt water, moist air, extreme dryness quick changes of temperature.
(3) It should not stretch in any direction.
(4) It should have a tensile strength of at least 75 lb. per inch width in any direction.
(5) The tendency to tear and split because of tacks, bullets, etc., should be almost nil.
(6) The weight should be taken in an atmosphere of 65 per cent relative humidity at 70° Fahr.
(7) The weight, yarn number and tensile strength of the fabric should be obtained when it is in a bone dry condition, i. e. after it has been subjected to a temperature of 221° Fahr. for two hours.
(8) Identity and average length of fibers should be ascertained.
(9) Determination should be made of the percentage moisture "regain" under the available range of temperature and humidity.
(10) A shrinkage determination should be made.

Some Representative Specifications, Strength and Weight Figures

In Table 4 are given some representative specifications which represent the average values of current practice.

TABLE 5.

Specifications	Weight per square yard ounces	Threads per inch warp	Threads per inch weft	Strength per inch width (warp) lb.	Strength per inch width weft (lb.)
Curtiss No. 66..... Oct. 26, 1916	4	96	100	91	102
R. A. F. No. 17-C.....	4	92	95	92	95
U. S. Army No. 1002.	3.75–4.4	94	100	75	85 (minimum)
McBratney tests.....	4	95	99	—	108
Clarence Whitman (cotton).....	4	275 threads per sq. in.		87	96

Messrs. Lamb, Finlay and Co. have kindly communicated the average values of tests extending over a number of shipments, in accordance with British Government specifications:

"Three pieces are cut from the length and three pieces from the width of the goods. These samples must be long enough to leave 6 in. clear between the grips and sufficiently wide to leave the test pieces 2 in. wide after trimming. The test pieces are soaked in water for two hours. They are then taken out and the excess water is removed and the goods put in an Avery machine, the load being applied at the rate of 50 lb. per inch width per minute."

This method of testing, while apparently arbitrary, is convenient and avoids errors due to humidity changes, and is preferable to a test on dry material.

In the National Advisory Report the following figures are given for fabrics of different weights:

	Weight in ozs. per sq. yd.	Strength Warp	Strength Filler
I.	3.67	65.0	54.4
II.	3.78	69.5	49.2
III.	3.87	80.7	79.0
IV.	4.04	86.9	74.0
V.	4.09	90.2	82.7
VI.	4.48	82.9	100.1
VII.	4.60	95.0	60.0
VIII.	4.86	90.4	102.5

TABLE 6.

Quality	Width inches.	Approximate breaking strength per inch. Warp.	Weft.	Weight per sq. yd.
A24	36	72 lb.	78 lb.	4.00 oz.
A29	36	90.5 "	101.9 "	4.00 "
A31	36	108.5 "	94.6 "	4.00 "
A33	36	114.7 "	103.6 "	4.00 "
*A37	36	112 "	115.6 "	4.12 "
*A40	36	129.4 "	123.4 "	3.75 "

*British Government Standard qualities.

Wing Dope and Varnish

The following notes on dope and varnish may be of interest to the manufacturer:

Dope alone on Irish linen surfaces has proven very satisfactory. Four to five coats, allowing about one-half hour for drying between each coat are ample protection for the most severe conditions. Very rigorous tests on samples exposed to the weather during the month of February resulted in no ill effects, the cloth remaining tight, glossy and without spots, cracks or tears. The weight of the covering is increased about .66 oz. per square yard per coat, with an application of approximately one gallon to ten square yards.

Varnish finish is recommended in many cases as more permanent and, being less effected by salt water, has some advantages on water machines. When repairing is to be done it is first necessary to remove the varnish before the patch is applied with dope, as a glue, causing some inconvenience.

Doped surfaces have about 8 per cent to 10 per cent more strength and more resistance to tearing. It is necessary to redope all surfaces every three to five months.

Cotton and silk fabrics have a tendency to rot when covered with dope or varnish and such surfaces are not recommended.

References, Part 2, Section 5

Airplane Fabrics

"First Annual Report of the National Advisory Committee on Aeronautics."
"Balloon and Aeroplane Fabrics," by Willis A. Gibbons and Omar H. Smith.
"Circular No. 41." *Bureau of Standards.*

Timber

Judge's "Aeroplane Design."
"Material of Construction," Adelbert P. Mills.
"Mechanical Engineers' Handbook," Lionel S. Marks.
"Lanza's Applied Mechanics."
"The Mechanical Properties of Wood," by Samuel J. Record (containing numerous references).
"Reports of Tests on the Strength of Structural Material," *Made at the Watertown Arsenal, Mass.*
Publications of the U. S. Forest Service on "The Mechanical Properties of Wood and Timber Testing."

Metals

"Materials of Construction," Prof. Upton, of Cornell University.

Wires and Cables

First Annual Report of the National Advisory Committee on Aeronautics. "Aviation Wires and Cables."
(This also contains much valuable information on fastenings.)

Turnbuckles

Arthur Orr, AVIATION AND AERONAUTICAL ENGINEERING, December 1, 1916.

Aeronautical Patents

Copies of these patents may be obtained for five cents each by addressing the "Commissioner of Patents, Washington, D. C."

1,221,234. Filed April 14, 1908. To Charles N. Sirch, Los Angeles, Cal. Aerial locomotion.

1,221,426. Filed April 8, 1916. To Joseph J. Duffy, Brooklyn, N. Y., assignor of one-half to Gideon N. Carleton, Brooklyn, N. Y. Aerial torpedo.

1,221,430. Filed August 19, 1915. To Alfred Extrand, Aberdeen, Wash. An airship.

ISSUED APRIL 10, 1917.

1,220,140. Filed March 27, 1916. To William C. Robinson, Grinnell, Iowa. Airplane-fuselage structure.

1,220,499. Filed April 25, 1916. To Russell R. Waterman, Pasadena, Cal. Steering and propelling means for dirigible airships.

1,221,841. Filed September 2, 1915. To William James De La Mare, Des Moines, Iowa. An airship.

Emergency Landings in Cross-Country Flying

By Capt. Joseph E. Carberry

The specter of forced landing in cross country flying, ever present to the disillusioned pilot of experience, often seems to be entirely disregarded by the younger generation of aviators. No doubt its presence robs flying of a great deal of pleasure, but the law of compensation will bring, inevitably, its own reward to the pilot who invariably follows certain well established rules that prudence and long experience have dictated.

It is assumed that every aviator in planning a cross-country flight will first acquaint himself with the character of the terrain he proposes to traverse. It is assumed that he will select his route after due deliberation and that he will plot his height at various points along that route, with regard to the possible emergency of a forced landing. It is also assumed that he is thoroughly familiar with the flying characteristics of his airplane.

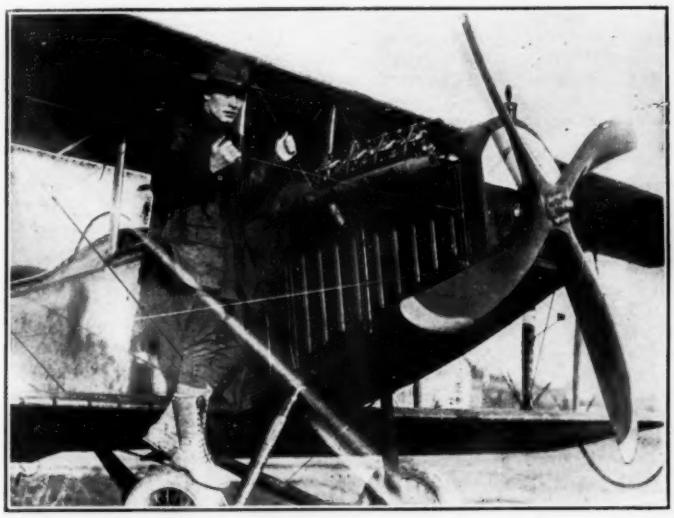

(C) International Film Service.

CAPTAIN JOSEPH E. CARBERRY, U. S. A.

The first article of this cross-country flying creed, to which every flyer should subscribe, is to always keep a landing place in mind. Some area must be constantly in view in which a landing will be attempted if trouble develops which compels it. In a flight from Satevo to San Antonio, Mexico, over mountainous country, by flying a zig-zag course, much in the manner of a person crossing a stream by stepping from stone to stone, it was possible for the aviator to have landed with safety to himself and passenger at any time. A straight cross-country flight to his objective, in case of engine failure, probably would have been disastrous. By careful routing, flights may be made with reasonable security over apparently impossible country.

Choice of Field

The most important consideration of course is the landing field itself. It should be of sufficient size and of such surface as to permit of easy entry and exit. Choose landing places over which you have passed, if possible to do so. If they are not available, glide forward, always endeavoring to circle and examine your choice before committing yourself to it. If possible select several alternative landing places. Make no hasty decisions, but once having made one, adhere absolutely to it. Remember that fields to right and left of your line of flight can be reached as easily as those directly in that line. Observe the approaches to possible landing fields and carefully scan them for fences, trees, and other obstructions. Telegraph wires, the dread of every flier, can generally be spotted by the poles. These should always be looked for. Be wary of landing in the immediate vicinity of bodies of water, as the neighboring ground often slopes abruptly. Exception of course must often be made to this rule. It may be the part of wisdom to follow a route with possible water landing places. In a recent flight from Philadelphia to Mineola, engine failure near Staten Island compelled a flyer to land in the sea immediately off shore. No alternatives existed except populated or wooded areas. This landing was accomplished with damage to the propeller and minor damage to the fore part of the body only. The airplane itself was salvaged and was readily placed in commission again.

In inspecting your prospective landing fields, keep the sun at your back. Endeavor also to land with the sun behind you. Especially is this important if the sun be low on the horizon.

A close observation of smoke along the course will be invaluable. If there be a strong surface wind, indicated by these and other signs, select possible landing fields with long axes in the direction of the wind.

Keep in mind that the aspect of fields changes materially with the seasons of the year. In case of doubt, choose a cultivated area in preference to one not cultivated.

Manner of Landing

The wind is the most important one element in this operation. Always land into the wind whenever possible. In gliding down to enter a field against a strong head wind, do not turn away from the area in view by spiraling at low altitudes, but make "S" glides instead. At least the final 500 feet should be so timed that you may enter the field selected by a right angled turn. Your judgment of distance by this method with practice can be made almost perfect. In this connection the French training school rules call for straight-away glides the last 500 or 600 feet.

Always keep a sharp lookout for all indications of wind at your landing place. I emphasize particularly "at your landing place." In one instance while descending at Chihuahua City, Mexico, an aviator observed smoke from a train on a railroad siding about five miles from the landing place chosen. Due no doubt to immediate local conditions, the wind at this landing place, very strong and very gusty, was in an almost opposite direction. As a result, after landing he was unable to reduce his ground speed and ran into a heavy mesquite field damaging the lower wings severely and preventing further flights that day.

Particular attention should be paid in practice flights to slow landings. This is essential when landing is to be made in heavy plowed fields, in snow or water. Under these conditions, always head into the wind, even if other considerations are somewhat against that procedure and stall for at least the last three or four feet. Remember to keep the tail well down. If compelled to land in a side wind, watch for possible obstructions, under the shelter of which you may complete your run on the ground. While flying at Buffalo, New York, from a narrow field bordered by high trees on one side, an aviator was able to take off and land successfully by keeping in the lee of these trees, which almost entirely broke the prevailing cross wind. Endeavor to make your glide at as moderate an angle as possible. A prolonged descent at a fairly steep angle will result in ultimately attaining the same speed as a dive over a short distance. The slowest possible landing should be your ideal in cross-country flying.

Finally, the type of airplane that you are flying should always be considered. For example, a tractor airplane with inclosed body may be maneuvered into a remarkably small area by violently skidding just before landing and then straightening out before the wheels touch the ground. Especially is a knowledge of this art valuable when it becomes necessary to enter after diving over obstructions. This requires a delicate touch at the wheel.

Above all, keep your airplane under control until the very last. Strict adherence to this rule will often result in landing without damage to the persons of the pilot or his passenger. Never despair of affecting a landing with safety to yourself, however formidable the aspect of the ground below you may be.

Manufacturers Wish Catalogs and Samples

The Aircraft Manufacturers' Association of 501 Fifth Avenue, New York, has requested the widest possible publicity for the following notice which is of great importance in connection with the Association's efforts to introduce standardization.

"At the regular monthly meeting of the Aircraft Manufacturers Association, held on Wednesday, April 11, at 501 Fifth Avenue, New York City, the secretary was instructed to get into communication with all manufacturers of finished products and producers of raw materials entering into the construction of aircraft of all descriptions.

"The Association desires particularly to receive small samples of fabrics suitable for wing covering, tubing, wood, veneer, catalogs of fittings, instruments and general equipment."

U. of P. Alumni Offer Six Planes

Interest in recruiting for the University of Pennsylvania's student battalion has been increased by the offer of six airplanes by wealthy alumni and the work of forming the air corps will begin shortly, according to newspaper reports. About sixty men will be needed to operate the machines and keep them in condition. The machines will be delivered as soon as needed.

Advisory Committee Report on Patent Situation

On March 2, 1917, Congress appropriated one million dollars

"to enable the Secretary of War and the Secretary of the Navy to secure by purchase, condemnation, donation or otherwise such basic patent or patents as they may consider necessary to the manufacture and development of aircraft in the United States for governmental and civil purposes."

This action was taken on account of the general belief that the needed expansion of the aircraft industry calling for the investment of large sums of money was being very seriously impeded by threatened law suits and the demand for the payment of what was looked upon as excessive royalties under certain important aeronautical patents. One such demand upon the manufacturers called for a royalty of five per cent on the price of the complete plane with motor and a minimum annual payment of $10,000 per manufacturer.

All makers in bidding for government business were obliged to add to their bids an extra amount representing the royalty they would have to pay under this one patent alone and the Army and Navy were confronted with many bids in which the contingent royalty amounted to over $1000 per airplane.

The National Advisory Committee for Aeronautics in whose hands the problem was placed for recommendation realized that it would be undesirable to use the fund provided for the purchase of patents until every means had been exhausted to secure a settlement on a reasonable basis between the different parties in interest. It realized that even in our present need it would be unwise to condemn a patent except as a last resort. The National Advisory Committee for Aeronautics is particularly anxious to encourage invention along aeronautical lines instead of discouraging it.

In reviewing the records of the Army and Navy Departments as to planes purchased during the eight years prior to our recent heavy appropriations for aerial defense it was brought out that four men in four different factories supplied all of those planes and apparently contributed most in the development and reduction to practice of the aviation art. These named in the order of their appearance on the records are Wright, Curtiss, Burgess and Martin. By a strange coincidence Curtiss and Burgess joined hands and later the Wright and Martin interests came together.

While there are other aircraft patents, it was found that these two combinations owned and controlled what might be considered the two dominating groups of patents.

The National Advisory Committee has therefore been influenced to a slight extent in its consideration of the patent question by the moral obligation that should be added to the patent rights of these two groups. Recognition of two groups of patents by the later industry and by the government becomes automatically recognition of practically all of the actual reduction of the art to practice by Wright, Curtiss, Burgess and Martin.

Numerous meetings were held in New York, Buffalo and Washington in an endeavor to arrive at a basis of settlement that would comprehend all of the patents owned or controlled by each group, that would be a fair recognition of their patent rights and that would at the same time cement together and strengthen the industry.

Basis of the Committee's Plan

The plan finally agreed upon by the Committee and submitted to the two companies for their consideration and early report is framed upon the following basis:

1. That it is desirable to avoid the delays and expense necessary to adjudicate all of the patents in question.

2. That it is not within the province of this Committee to attempt to determine the value of one patent against another or the validity of any patent.

3. That it is desirable at once to arrive at some fair basis for the recognition of the patents of both parties that will clear up this matter and permit the more rapid expansion of the industry.

4. That the relative contributions to the establishment of the aircraft industry as between Wright and Martin on the one hand and Curtiss and Burgess on the other hand may be said to offset each other, and that the recognition of each should be in the same total amount.

5. That by reason of Curtiss' patents running approximately three times as long as Wright's, the royalty to the Curtiss-Burgess group might be made about one-third of the amount per plane to be allowed to the Wright-Martin group.

6. That instead of endeavoring to establish a difference as between airplane, seaplane or flying boat, the royalty should be spread uniformly upon all three types.

7. That the royalty should be a flat rate on each plane with or without engine instead of a percentage of cost or selling price.

8. That royalty should commence upon all planes manufactured and sold after March 2, 1917, and that those manufactured and sold prior to that date be exempted from royalty.

In submitting this plan, the National Advisory Committee for Aeronautics has not attempted to draw up a finished legally approved agreement but instead to present its plan in the simplest possible form.

Proposed Plan

1. That all airplane manufacturers as members of the Aircraft Manufacturers' Association join in a cross licensing agreement as of March 2, 1917.

2. That this agreement cover all patents now owned or controlled by or which may later be owned or controlled by the Aircraft Manufacturers' Association or any of its members; the terms of the cross licensing agreement to be in general based upon the similar agreement existing in the National Automobile Chamber of Commerce known as the "Cross Licensing Agreement."

3. That each member pay into the treasury of the Aircraft Manufacturers' Association the sum of $200.00 for each airplane manufactured and sold (with or without engine), by that member. These payments to be made quarterly and to continue subject to the conditions hereinafter provided.

4. That the funds thus collected be disposed as follows:

At each quarterly period for each airplane manufactured and sold during the preceding quarter there shall be paid

$135 to the Wright-Martin Aircraft Corporation
$40 to the Curtiss Aeroplane & Motor Corporation
$25 to the treasury of the Aircraft Manufacturers' Association to cover its operating expenses and to create a fund for further development.

5. Payment to the Wright-Martin Aircraft Corportion shall cease May 22, 1923, and payment to the Curtiss Aeroplane and Motor Corporation shall cease at such time as the total amount paid to them shall equal the amount paid to the Wright-Martin Aircraft Corporation, but in any event shall cease October 30, 1933.

6. After May 22, 1923, the amount paid per airplane by each manufacturer shall be reduced by the amount of the Wright-Martin royalty, which will have ceased on that date and shall thereafter be $65.00 per airplane manufactured and sold during such remaining period as payments of royalty are made to the Curtiss Aeroplane and Motor Corporation, as above provided for.

7. An airplane as herein mentioned shall be understood to mean any form of heavier than air craft using wing surfaces for sustentation, stabilizing surfaces, rudders for steering, and power plant for propulsion through the air, whether operated from land or water.

C. D. Walcott, Chairman; S. W. Stratton, Member; J. H. Towers (Lt. U. S. N.), Member; S. D. Waldon (Capt. S. C.), Member.

Sub-Committee on Patents.

Proposed Aerological Stations

An effort is being made by the National Advisory Committee for Aeronautics to promote the study of the atmosphere over this continent and the adjacent waters, and have a set of accurate charts made for the benefit of our aviators.

Especially is this problem vital as it concerns the national preparedness program. This fact was brought out by a telegram read at the Aero Club of America banquet recently in New York, from Dr. Charles D. Walcott, secretary of the Smithsonian Institution, and chairman of the executive committee of the National Advisory Committee for Aeronautics, who advised that the assembled members urge most strongly the establishment and maintenance of aerological surveys over North America and the adjoining waters for the protection of the lives of United States aviators, the safety of aircraft and the furtherance of their operation.

"At present," stated Dr. Walcott, "practically nothing is known of the movements of the fluid in which shortly thousands of aircraft representing millions of dollars in investment, will be floating, and, what is far more important, they will be operated by thousands of our finest specially trained young men."

Advisory Committee's Activity

During the past twelve months the National Advisory Committee for Aeronautics met with manufacturers of airplanes and airplane engines in an effort to expedite the delivery of machines to the Government, and has been of great assistance in the solution of many other problems.

Now it proposes that earnest thought be put on the vital necessity of recording and charting the irregularities of the atmosphere so that our aviators in peace or in war may have the benefit of exact information both for their own safety and as an expedient to efficient operation of aerial messenger, reconnaissance and fighting service.

An estimate of appropriation of $100,000 for the establishment of special aerological stations in connection with the United States Weather Bureau will be brought to the attention of Congress.

Aero Club Banquet

The eleventh annual banquet of the Aero Club of America was successfully held in the Waldorf-Astoria hotel, New York on the evening of March 30. Alan R. Hawley, president of the Aero Club of America, presided and Henry A. Wise Wood acted as toastmaster. Among the speakers were Hon. James W. Gerard, former Ambassador to Germany; Major General Leonard Wood, U. S. A.; Rear Admiral Robert E. Peary, chairman of the National Aerial Coast Patrol Commission, Stephane Lauzanne, editor of the Paris *Le Matin*, and Godfrey L. Cabot, president, Aero Club of New England.

Mme. Geraldine Farrar sang the "Star Spangled Banner"

A number of congratulatory messages were read at the banquet.

Howard E. Coffin's Message

Howard E. Coffin, a governor of the club and member of the Council of National Defense, wired as follows:

"I desire to congratulate the club upon its share in the development of aeronautics during the past year and impress upon our members the seriousness of the need for the most active and sincere cooperation, both with the military departments and with the newly formed Manufacturers' Association. The influence of the Advisory Commission of the Council of National Defense will be exerted in favor of the adoption of a three-year construction programme with a definite assignment to each manufacturer of his part in the work. We must have standardization so far as possible in materials and in the details of design, and the number of models assigned to each factory must be reduced to a minimum. It is only through a proper classification and concentration of our industrial resources in this industry that we may hope to make definite progress in the art so vitally necessary in the defense of this nation."

Sperry Awarded Collier Trophy

The Robert J. Collier Trophy, which is awarded annually for the greatest achievement in aviation in America, the value of which has been demonstrated by use during the preceding year, was awarded to Elmer A. Sperry and Lawrence B. Sperry for the development and demonstration of the Sperry drift indicator.

The following medals of merit were also awarded:

To Miss Ruth Law, American distance record cross country, November 19, 1916, 512 miles.

Philip A. Carroll, for his patriotic work in training military aviators at Governor's Island, 1916.

Floyd Smith, American hydro altitude records: January 12, 1916, one passenger, 12,333 feet; January 11, 1916, two passengers, 9,524 feet; February 15, 1916, three passengers, 9,603 feet.

Corporal A. D. Smith, U. S. A., American hydro duration record, Feb. 19, 1916, 8 hrs. 42 mins.

Captain C. C. Culver, U. S. A., for wireless experimentation, 1916.

James V. Martin, for the invention of the aerodynamic stabilizer.

Aerial Coast Patrol Unit No. 1, for its pioneer work in developing aerial coast defense.

In recognition of aviation service rendered at the Mexican Border, 1916: Major B. D. Foulois, Capt. J. E. Carberry, Capt. W. C. Kilner, Capt. Ira D. Rader, Capt. C. C. Chapman, Capt. H. A. Dargue, Capt. R. H. Willis, Capt. T. S. Bowen, Capt. E. S. Gorrell, Capt. A. R. Christie, Capt. T. S. Dodd, U. S. A.

Victor Carlstrom, three additional bars to Medal of Merit he already holds for:

American Altitude Records: April 30, 1916, one passenger, 16,225 ft. April 10, 1916, two passengers, 11,180 ft.

American Distance Cross Country Record: May 20, 1916, one passenger, 283.02 miles.

Winning of the Curtiss Marine Flying Trophy for 1916.

T. C. Macauley, three additional bars to Medal of Merit he already has for: American Distance—Closed Circuit Record: May 4, 1916, five passengers, 154.08 miles. American Hydro Altitude Records: May 4, 1916, five passengers, 775 ft. April 30, 1916, six passengers, 875 ft. American Hydro Duration Record: May 4, 1916, five passengers, 2 hrs. 23 min.

One of the features of the banquet was the announcement that Rodman Wanamaker offered a large twin engine flying boat to the United States Government.

American Searchlight Stops Zeppelin Raids

Reports recently received from England indicate that it is an American invention, the new Sperry searchlight, which is one of the two factors that have rendered recent Zeppelin rails on London abortive. It is said that the new carbons used in these lamps to increase their intensity have been among the most important factors in frustrating the Zeppelin raids.

This lamp has been used recently for experimental work on the aviation field at

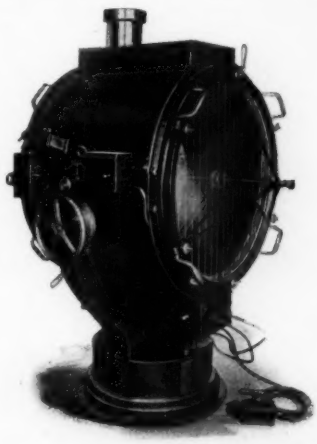

THE BILLION CANDLE-POWER SEARCHLIGHT

Mineola. It illuminates a target ten times as brilliantly as an ordinary projector, and its arc is as bright as sunlight.

The brilliancy of this lamp is due, among other things, to the special carbons. The arc burns at a temperature of 10,000 degrees Fahr. The candlepower of the 60-in. Sperry searchlight exceeds 1,250,000,000.

An important feature of this searchlight is the remote control, which is very desirable for anti-aircraft work. By means of this apparatus the lamp can be operated, even upward at an angle of 90 degrees, from a distance as great as one mile. This lamp can be used for other purposes, such as coast defense work, for which its long range makes it specially suited. The 60-in. Sperry searchlight has been seen 150 miles away. The lamp can also be used for signaling and is installed on naval vessels.

The installation of these new searchlights, together with the use of incendiary bullets for machine guns is said to have resulted in the stopping of Zeppelin raids on London. Searchlights stationed at coast towns pick up the Zeppelins and permit the heavier than air machines to destroy them.

Packard Engine Progressing

The 200-horsepower aircraft engine which the Packard Company has been developing in the past two years is said to be about ready to take flight. The process of installing the engine in a specially constructed plane is now going on rapidly.

Final work on the engine has been hastened by developments in the international situation that may create an urgent need for aircraft in America.

The flying tests of the new engine will be made at the Joy aviation field, near Mount Clemens, Mich., where there are unusual facilities for trials over both land and water.

W. B. Stout, chief engineer of the Packard aircraft division, says that the machine will be capable of 90 miles an hour. A fast climb is also expected.

Fort Omaha Notes

Frequent flights in free balloons are being made from the Fort Omaha, Neb., school.

On one flight a few days ago Pilot Leo Stevens with Capt. John Prentice and Lieut. L. C. Davidson ascended at Fort Omaha at 1.30 p. m. and landed at Diagonal, Iowa, ninety miles away, at 6.08 p. m.

Sixty Miles an Hour

On March 24 Leo Stevens with Captains Prentice, Muller and McElgin and Lieutenant Davidson made what is believed to be a new record for speed in a free balloon, traveling from Fort Omaha to a point seven miles from Macksburg, Iowa, a total distance of over a hundred miles in one hour and forty minutes.

Notes of the Memphis Training Station

Captain Joseph C. Morrow, Officer in Charge, has returned from a trip to Fort Barrancas, Fla., where he completed his examination for promotion.

A. B. Lambert, vice-president of the Aero Club of America, visited this school March 14 and while there he was taken for a passenger flight in one of the school's new machines.

Captain A. R. Christie, Officer in Charge of Training, has established a construction and repair department under the direct supervision of Chief Mechanician Houser. Five sergeants of the Signal Enlisted Reserve Corps have been directed to report to Mr. Houser for practical instruction in overhauling machines.

Reception of First Tennessee

A feature of the reception arranged in honor of the First Tennessee troops when they returned from the Mexican border was the flight of a squadron of nine airplanes southward, and over and parallel with the parade of troops. Forty-five parachutes were dropped from the machines in flight. To each parachute was attached a small American flag and a spool on which was typed "U. S. Aviation Station, Memphis, welcomes the First Tennessee." Captain Joseph C. Morrow, Officer in Charge, as observer, and Captain A. R. Christie, Officer in Charge of Training, as pilot, occupied the leading machine. The eight other machines were piloted by flying instructors and student instructors, each accompanied by a sergeant of the Signal Enlisted Reserve Corps (applicants for commissions in the Signal Officers Reserve Corps, who acted as observers. Each observer made a written record of his observations which he submitted to the Officer in Charge of Training after the flight. The following is one of the reports submitted:

First machine arose from the aviation field at 9.00 a. m., March 18, 1917.

Squadron attains an altitude of 3,000 feet at 9.10 a. m. After circling the field squadron turns southward 9.12 a. m. City seen to the north and large river to the westward. River lying in a north and south direction. Two large bridges cross the river from the city side. Three steamboats in midstream, one with log raft in tow. Four steamboats lying at wharves. Arrived over business section of city at 9.15 a. m. Good wagon roads enter the city from north, northeast, east, southeast and south. Railway stations, shops and yards west side of city near river. Public buildings, probably post office, custom house and courthouse north and east of business district. Railroads enter city from north, east and south. A possible landing place for airplanes on west side of river and about 3 miles south of large bridge. Another possible place for landing in public park east side of city. Territory surrounding the city covered with water in many places and thinly wooded, water supposed to be due to recent heavy rains. Automobiles, wagons pedestrians and troops seen in streets of city. Streets run north and south, and east and west. One plane forced to land shortly after taking the air, but reached the field in safety by gliding. Rear unit of squadron returned to field at 10.45 a. m.

Duesenberg Refinanced

The Duesenberg Motors Corp. has succeeded the Duesenberg Motor Co., St. Paul, and the Loew-Victor Engine Co., Chicago, its capital being $1,500,000, of which $1,050,000 is paid in. The company has located a plant in the East at Edgewater, N. J. The engineering and experimental forces have already moved from Chicago and the company will, in a short time, be building on a commercial basis a line of Duesenberg engines for both automobiles and aeronautical purposes, devoting the output of the Chicago plant to marine models. The Loew-Victor Engine Co. has been building one of the largest high-speed marine gas engines on the market for the past year. These motors were designed by F. S. Duesenberg. The Chicago plant will in the near future be consolidated with the Edgewater plant. The sales and executive offices of the company will be at 120 Broadway, New York.

The personnel of the organization is as follows: Directors, J. R. Harbeck, F. S. Wheeler, Charles Stollberg, K. S. Breckenridge, L. A. Welles and F. B. Page. The first five are all of one of America's largest industrial corporations. Mr. Page is vice-president and general manager of the E. W. Bliss Corp.

J. R. Harbeck, who was president of the Loew-Victor Engine Co. since its formation, is president and managing director of the Duesenberg corporation. E. L. Decker is assistant to the president; H. A. Wing, is secretary and treasurer; C. B. Page is general manager in charge of production and N. G. Rose is general sales manager. F. S. Duesenberg is chief engineer. A. S. Duesenberg is assistant engineer. M. M. Whitaker is assistant engineer and naval architect. G. A. Beilstein is purchasing agent and F. E. Lampe is superintendent.

Frank H. Trego Has Factory

Frank H. Trego has purchased the factory buildings of the A. C. Gilbert Co. at Fox and Ferry Streets, New Haven, Conn. The Trego Motors Corp. was formed a few days ago with a capital of $1,500,000, to build engines, airplanes and flying apparatus.

Yale Unit Officially Recognized

The Yale flying unit known last summer as Aerial Coast Patrol Unit No. 1, a voluntary unofficial designation, has enrolled in the Second Naval District Coast Defense Reserves. Mr. Davison has provided twelve airplanes and all necessary equipment for the Yale flying unit.

The aviators are practising in Florida now and will come to Newport when ordered to active duty.

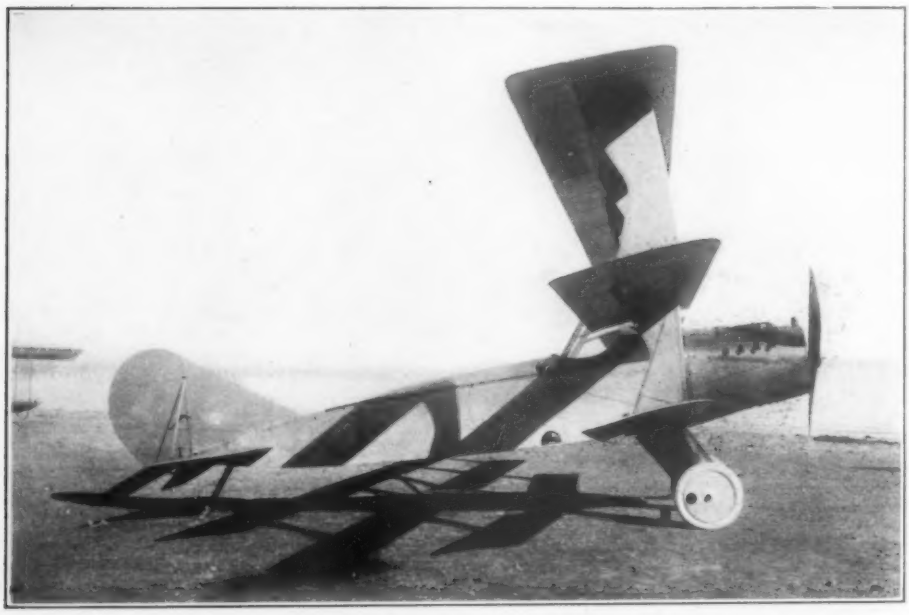

The above photograph shows the latest picture of the Curtiss Model L pursuit triplane. Recent changes which are noteworthy are the raising of all three sets of planes, shortening the span and introducing a dihedral angle into the bottom plane and greatly increasing the gap between the center and top planes.

Flint Aircraft Co. Organized

The Flint Aircraft Co., Inc., of Flint, Mich., has been organized by several well known automobile men and has taken over the Williams Aeroplane Co. of Fenton. W. W. Clark, Jr., of the Buick Motor Co. has been elected president and Frank Freeman, secretary-treasurer. The other directors are Dr. G. H. Bahlman, W. F. Stewart, president of the Stewart Body Co., and Harry Bassett all of Flint. Eghert B. Cresswell, formerly with the Thomas Brothers Aeroplane Co. is the general manager of the new company. The company's plans have not yet been announced.

Henri Julliot with Goodrich

Henri Julliot, French builder of dirigibles, is in this country supervising the erection of the dirigibles which the Government is having built by the B. F. Goodrich Co.

He built the big dirigibles, "Le Jaune," "Lebaudy," "La Republique," "La Liberte," and "La Patrie." His first military dirigible was built in 1902 before Count von Zeppelin had made his first balloon.

"The United States will need many dirigibles in hostilities with Germany," M. Julliot declared. "They are essential for coast defense. The larger dirigibles can go out to sea for 500 miles and watch for enemy fleets."

Because they can stand still in mid-air and because they can carry 6000 to 8000 pounds of explosives in addition to their own weight, they will play a big part in naval offensive operations.

"To become an operator of a military dirigible one must have youth, a few months' training and a working knowledge of physics and mechanics."

M. Julliot will spend two or three years in this country, designing and supervising the construction of military dirigibles.

Guard at Essington Station

Rather than take any chance on having some German sympathizer or agent destroy the airplanes now at the Philadelphia School of Aviation, at Essington, Robert E. Glendinning, head of the school, is paying a squad of watchmen to guard the machines at night. This he will continue to do, he says, until the United States Government takes possession of the organization. This action is daily expected.

The work of the school is seriously handicapped owing to the lack of machines, according to Mr. Glendinning. There are now more than 300 applications for training hanging fire because there are not sufficient machines for that purpose. Ordinarily the school has only two planes, but both Mr. Glendinning and George Thomas have placed their private machines at the disposal of the students.

The Government has notified the school officials that they are sending twelve more machines to Essington, but as yet they have not arrived.

A squad of twelve enlisted men under Capt. William S. Ocker of the Officers' Reserve Corps has been placed on duty at Essington in preparation for active flying operations at the school.

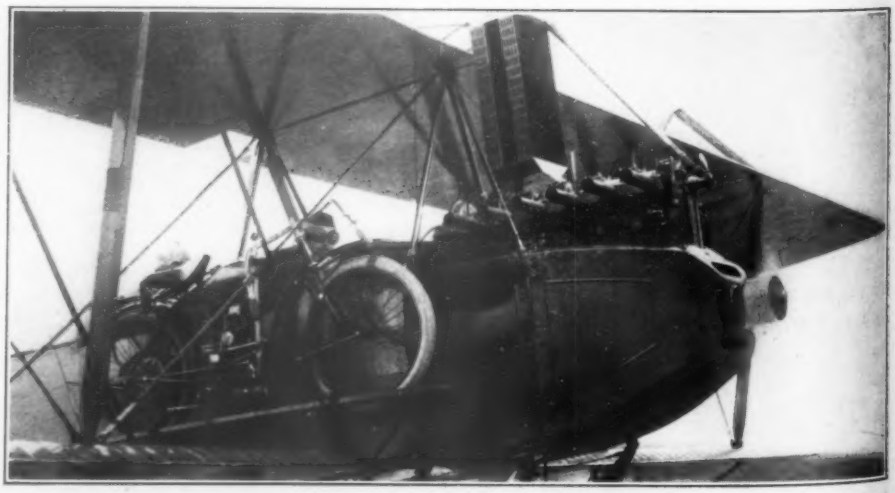

MARTIN MODEL R RECONNAISSANCE TRACTOR WITH NEW DOUBLE OPPOSED TWO-CYLINDER INDIAN MOTOCYCLE FITTED ALONGSIDE THE BODY

CURTISS AEROPLANE & MOTOR CORPORATION

BRAKE HORSE POWER CURVES
SHOWING THE PROGRESSIVE PERFORMANCE
OF THE
CURTISS "V2" ENGINE
5" x 7"

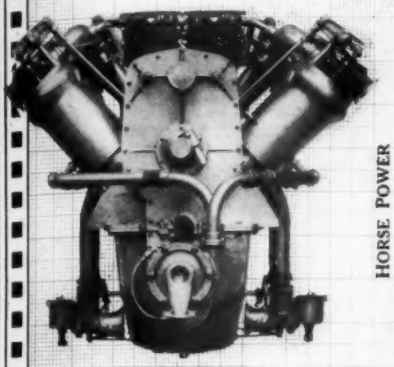

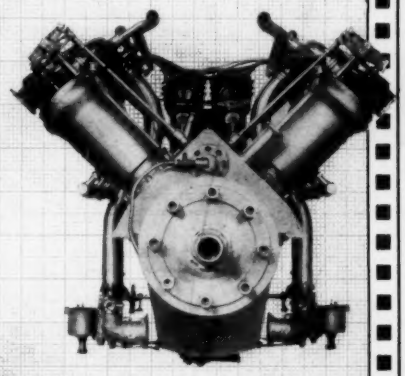

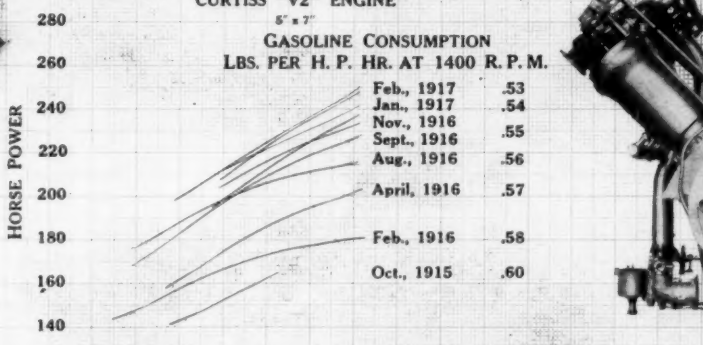

GASOLINE CONSUMPTION
LBS. PER H. P. HR. AT 1400 R. P. M.

Feb., 1917	.53
Jan., 1917	.54
Nov., 1916	.55
Sept., 1916	
Aug., 1916	.56
April, 1916	.57
Feb., 1916	.58
Oct., 1915	.60

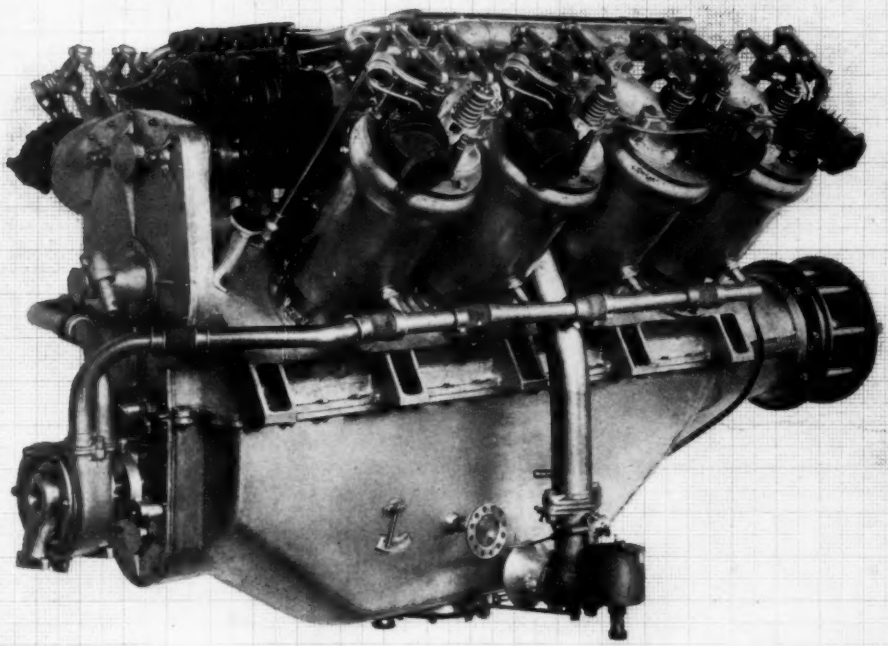

Curtiss

THE Motor shown above is a Curtiss 8-cylinder, Vee, 4 stroke cycle, rated at 200 H-P at 1400 R.P.M.
Weight with propeller hub—725 pounds.
Double ignition, two high tension—8-cylinder magnetos.
Water cooled—centrifugal pump.
Oiling force feed to all bearings.

Full information and installation dimensions gladly furnished on request

CURTISS AEROPLANE & MOTOR CORPORATION
BUFFALO, N. Y.

THE SIGNIFICANCE TO YOU OF THE MEMBERSHIP OF

Aviation and Aeronautical Engineering

IN THE ASSOCIATED BUSINESS PAPERS, INC.

YOU depend upon AVIATION AND AERONAUTICAL ENGINEERING for an unbiased and accurate report of all news affecting your business interests.

Probably, too, you give heed to its editorial counsel in many matters of considerable consequence. You have a right, therefore, to know about the policies and principles back of the important service rendered by AVIATION AND AERONAUTICAL ENGINEERING.

The membership of this publication in the Associated Business Papers, Inc. (the International Association of Class, Trade and Technical Papers), means that it has achieved an exceptionally high publishing standard, and has subscribed unreservedly to these—

STANDARDS OF PRACTICE OF BUSINESS PAPERS

The publisher of a business paper should dedicate his best efforts to the cause of Business and Social Service, and to this end should pledge himself.

1. To consider, first, the interests of the subscriber.

2. To subscribe to and work for truth and honesty in all departments.

3. To eliminate, in so far as possible, his personal opinions from his news columns, but to be a leader of thought in his editorial columns, and to make his criticisms constructive.

4. To refuse to publish "puffs," free reading notices or paid "write-ups;" to keep his reading columns independent of advertising considerations, and to measure all news by this standard: "Is it real news?"

5. To decline any advertisement which has a tendency to mislead or which does not conform to business integrity.

6. To solicit subscriptions and advertising solely upon the merits of the publication.

7. To supply advertisers with full information regarding character and extent of circulation, including detailed circulation statements, subject to proper and authentic verification.

8. To co-operate with all organizations and individuals engaged in creative advertising work.

9. To avoid unfair competition.

10. To determine what is the highest and largest function of the field which he serves, and then to strive in every legitimate way to promote that function.

If you have read the foregoing standards, there is not much left to be said, except to tell you that these principles are *present day realities* and not merely beautiful ideals for future attainment.

THE ASSOCIATED BUSINESS PAPERS, INC.

The International Association of Trade, Technical and Class Publications

220 WEST 42nd STREET NEW YORK CITY

CLOTHING FOR AVIATORS

WINDPROOF —— WARM —— WATERPROOF

WE ARE SPECIALISTS IN THE MANUFACTURE OF

AERONAUTICAL RUBBER GOODS

AVIATORS' SHOES

Light
Flexible—Waterproof
Non-Slipping

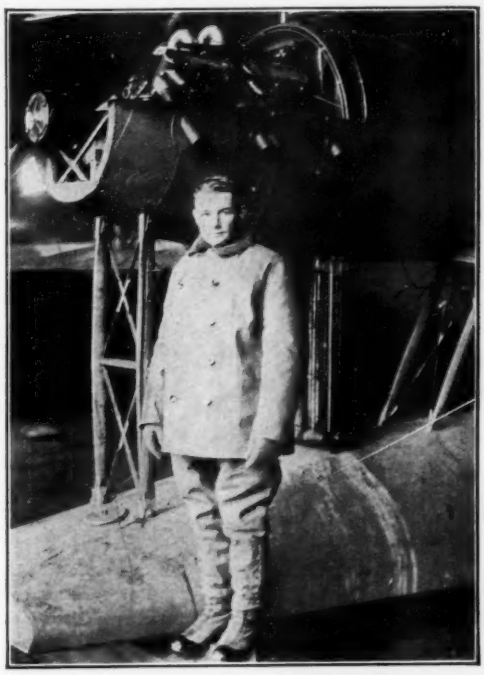

WE ARE PREPARED TO FURNISH THE VERY HIGHEST GRADE

BALLOON FABRICS

In Various Textures, Weights and Colors.

GASOLINE HOSE
MATTING
SHOCK ABSORBERS

Both Ring and Cord

UNITED STATES RUBBER COMPANY
1790 BROADWAY, NEW YORK

AEROPLANE TUBING

ESPECIALLY MADE TO YOUR OWN REQUIREMENTS

We are at present manufacturing for the largest aeroplane manufacturers both here and abroad our high grade tubing made to any contour and thickness of wall on short notice.

We have exceptional facilities for almost over-night deliveries.

Steel tubing made for all requirements.

Send us your inquiries.

The Empire Art Metal Co., Inc.
College Point, N. Y.

The Company's new plant is equipped with the most modern facilities for filling orders for aircraft of

Standard and Special Designs

Land and water flying at door of factory

Main Office and Factory:
Lincoln Highway, near Passaic River
Telephone Market 9096
New York Office: 17 Battery Place
Telephone Rector 2461

BENOIST

Four Standard Models

Single and Twin Motored

Three to Seven Passengers

Holder of many World and American Records

Six Years Practical Experience

Land and Water Airplanes

On application by interested parties, we will submit specifications on triple and four motored machines carrying as many as twenty passengers, and guarantee performance.

Benoist Aeroplane Company
SANDUSKY, OHIO

ONE YEAR—24 ISSUES—ONE DOLLAR

AVIATION AND AERONAUTICAL ENGINEERING

The COURSE IN AERODYNAMICS AND AEROPLANE DESIGN, by the Instructors in Aeronautics in the Massachusetts Institute of Technology.

SPECIAL TECHNICAL ARTICLES written by the leaders in the Profession on Every Phase of AERONAUTICAL PROGRESS.

POPULAR AERONAUTICAL ARTICLES in Every Issue, Illustrated by the BEST PHOTOGRAPHS and LOTS OF THEM.

All the REAL NEWS of the Industry and of the Aviators presented in Condensed and Attractive Form.

The Doings of the AERO CLUBS and all the FEDERAL and STATE MILITARY and NAVAL NEWS.

THE GARDNER, MOFFAT COMPANY

120 West 32d St., New York

INDIAN—the Emergency Motorcycle

It is its never failing ability to produce the greatest sustained speed, power, and all-round dependability in emergencies demanding positive and instantaneous performance that gives first consideration to the 1917

Indian Motocycle
With Powerplus Motor

Demonstrations of 1917 Indian models will gladly be arranged for interested military officials.

Illustrated **1917** *Indian Catalog and other descriptive literature sent anywhere on request.*

HENDEE MANUFACTURING COMPANY

(Largest Motorcycle Manufacturers in the World)

859 STATE ST., SPRINGFIELD, MASSACHUSETTS

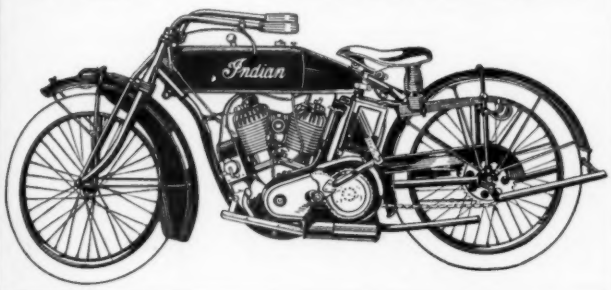

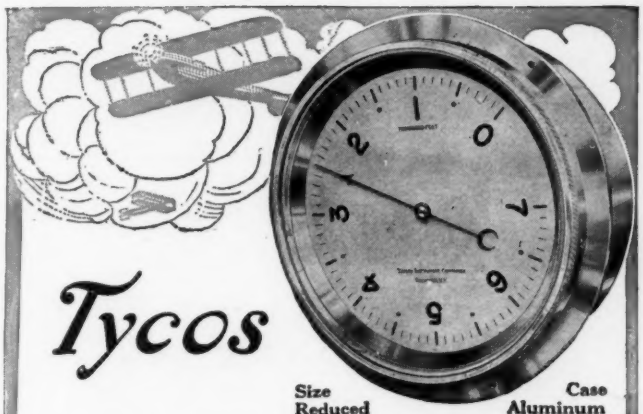

Tycos

Size Reduced **Case Aluminum**

Aviation Barometer

Made in United States.

Movement compensated to overcome changes in temperature. Dial revolves so zero of altitude can be set at the hand at start of flight without showing error, as scale is equally divided.

Supplied to U. S. Navy, U. S. Signal Corps, leading manufacturers and to different Foreign Governments.

In material, workmanship, pride of manufacture, no effort is lost, no expense spared to make this Barometer worthy of the Tycos Reputation.

Let us submit information on this Barometer as well as on Inclinometers and Pocket Altitude Barometer—the purchasing we leave to your discerning judgment.

Taylor Instrument Companies

Rochester, N. Y. **U. S. A.**

For sixty years makers of scientific instruments of superiority

THE GENERAL ORDNANCE COMPANY

NON-RECOIL GUN

There are hundreds of these guns being used Abroad in the War on

AIRPLANES
MOTOR BOATS
AUTOMOBILES

SOLE MANUFACTURERS (DAVIS PATENTS)

THE GENERAL ORDNANCE COMPANY

DERBY, CONN., U. S. A.

The Buck Automatic Aerial Torpedo

AFTER a series of tests in Colorado, the Buck Aircraft & Munition Co., who own and control the Buck Automatic Aerial Torpedo Patents, are prepared to negotiate with Governments and other parties for production on a quantity basis.

The Buck Automatic Aerial Torpedo is an air craft equipped with a 50 H.P. Motor, and designed to carry explosives through the air to any distance up to thirty miles. A time controlled release drops the torpedo at any given distance. The entire equipment is automatic and is launched from a compressed air catapult mounted on a motor truck, the engine of which furnishes the air for the catapult.

The torpedo can be fired at any range and at any degree of the compass.

The launching of the torpedo is without shock, and consequently the most dynamically explosive materials can be carried.

The Buck Gravity Stabilizer will be used on all machines manufactured by the company.

The Buck Aircraft & Munition Co., Inc.

Ernst and Cranmer Building
Denver, Colo.

Address all Correspondence to
New York Office
Room 327, 42nd St. Building

Factors of Safety

These Count in Aeroplane Construction

NON-INFLAMMABLE

Cellulose Acetate Base

Celestron Cloth Varnishes

provide another SAFETY FACTOR

NON-INFLAMMABLE

Celestron Sheets AND Films

Transparent — Waterproof

MANUFACTURED BY

Chemical Products Company

93 Broad Street Boston, U. S. A.

Manufacturers of Cellulose Acetate for nearly 15 years

Fahrig Anti-Friction Metal

The Best Bearing Metal on the Market
A Necessity for Aeroplane Service

Fahrig Metal Quality has become a standard for reliability. We specialize in this one tin-copper alloy which has superior anti-friction qualities and great durability and is always uniform.

When you see a speed or distance record broken by Aeroplane, Racing Automobile, Truck or Tractor Motor, you will find that Fahrig Metal Bearings were in that motor.

FAHRIG METAL CO., 34 Commerce St., N.Y.

SEES AT NIGHT

SERVICE is as important a factor in selling as advertising. Besides merely placing our name before you and telling of our product we must exhibit our service to you.

The Army and Navy and the largest manufacturing companies are using *Radium Luminous Material* on electrical devices, clocks, revolution indicators, altimeters, range scales, gages used at night, on fish bait and on wrist and pocket watches.

A spot or figure painted as we would paint it shines in the dark continuously, requiring no maintainance over a period of years.

To our customers we have given a practical demonstration of real service. This we can give you, too, as well as greatest luminescence and reasonable prices. Our field is continuously enlarging.

Let us experiment for you at our expense.

We say this now; let us prove it.

RADIUM LUMINOUS MATERIAL CORPORATION
55 LIBERTY STREET, NEW YORK

TURNBUCKLES

of the

Highest Quality

Bolts and Nuts

to Satisfy the Most
Exacting Requirements

Standard Screw Co.

(of Pennsylvania)

CORRY, PA.

New York Office: Woolworth Building

AIRPLANE CRANKSHAFTS

With a Perfect Record

WYMAN-GORDON COMPANY

Every precaution known to science to safeguard quality is found in our factory methods.

WORCESTER, MASS., U. S. A.

ESTABLISHED 1883

A POPULAR PRICE LAND OR WATER PLANE

TWO PLACE LAND MODEL $3,000

TWO PLACE WATER MODEL $3,100

KYLE SMITH AIRCRAFT CO., -:- -:- WHEELING, W. VA.

THE RELIABLE HOUSE DUTTON

OUR SPRUCE LOGS

Are perhaps the best on the Pacific Coast. Our facilities for supplying Air-plane Spruce are unsurpassed.

A. C. DUTTON LUMBER CORPORATION

Mills
SOUTH BEND, WASH.
TACOMA, WASH.

General Sales Department
SPRINGFIELD, MASS.

Wharves, Warehouses and Storage Yards
POUGHKEEPSIE, N. Y.

BOYCE MOTOMETER

MOTOR HEAT INDICATOR

AN ESSENTIAL SAFETY DEVICE FOR AIRPLANES

FOREWARNS OVERHEATING

THE MOTO-METER CO., Inc.



15 Wilbur Ave.
Long Islan d City
New York

Airplane Cylinder Forgings

We make a specialty of hollow forging in dies, airplane cylinder forgings, of high and low carbon O. H. or alloy steels.

Also propeller hubs, flanges, shafts, etc.

Miscellaneous hammer and hydraulic press die forgings of all types.

COURTESY—QUALITY—SERVICE
our motto

TIOGA STEEL & IRON COMPANY
52nd and Grays Ave. Philadelphia, Pa.

Erie Specialty Co.

Erie, Pa.

Manufacturers

AIRCRAFT METAL PARTS, BOLTS, NUTS, CLEVIS PINS, SHACKLES, EYE BOLTS, MACHINE SCREWS, ETC., ETC.

Fittings, Forgings, Castings

We are increasing our equipment in every department—foundry, forge shop, stamping, automatic screw machines, tool and die shop.

All our products are rigidly inspected and meet all Government requirements.

Are you on our catalog mailing list?

COUNTERBALANCED

Patent applied for

WE HAVE SHIPPED 40624 *COUNTERBALANCED CRANKSHAFTS* up to April 9th, 1917

AVIATION CRANK SHAFTS

WE ARE SERVING 11 AVIATION MOTOR COMPANIES MAKING 16 DIFFERENT MODELS.

WE HAVE SHIPPED 3440 AVIATION CRANKSHAFTS EVERY SHAFT GUARANTEED

The Park Drop Forge Co.

Cleveland

Aeroplane Linen

USED by the BRITISH GOVERNMENT in their air service; also by the UNITED STATES GOVERNMENT and Large Aeroplane Manufacturers

Samples and Specifications sent on application

Robert McBratney & Company

Linen Manufacturers and Importers

121-123 Franklin Street, New York

and at Belfast, Ireland

The Perfect Starter

Tested and Approved by United States, British, Dutch, Norwegian and Swedish Governments

A device convertible to an air motor for starting, or an air compressor for storing in a suitable tank the air for its own energy. Entirely self-contained and couples direct to crankshaft of engine without gear reduction or any adaptation other than a suitable coupling.

Model C—For starting engines up to 250 H.P. Weight 39 lbs.—complete with fittings for single engine 70 lbs.; twin engines 110 lbs.

Write for complete information

Model D—For starting engines up to 150 H.P. Weight 34 lbs.—complete with fittings for single engine 58 lbs.; twin engines 96 lbs.

The Motor-Compressor Co., Newark, N. J., U.S.A.

A Limited Number of Bound Volumes of

AVIATION

AND

AERONAUTICAL ENGINEERING

(440 Pages)

Containing First Twelve Installments of the Twenty-four Part Course in

AERODYNAMICS AND AIRPLANE DESIGN

Are Now Available at $3.00 per Volume

THE GARDNER, MOFFAT COMPANY, Inc.

120 WEST 32d STREET, NEW YORK

"CHELSEA"

EIGHT-DAY, HIGH-GRADE

SHIP'S BELL CLOCKS

And Non-Striking Clocks — Practically Waterproof Cases, for use on YACHTS, STEAMSHIPS, MOTOR BOATS, HOUSEBOATS, Etc., and

AEROPLANES and SEAPLANES

ALSO our (patented) AUTOMATIC SHIP'S BELL CLOCK. The Clock in pilot house, cabin, etc., operates large bell forward Circulars on application—latest-up-to-date accessory.

And, Clocks for *Finest Residences, Clubs* and *Automobiles*

The Standard of the World

On Sale by Highest Class Jewelers and Dealers in Nautical Instruments

CHELSEA CLOCK CO., 16 State St., BOSTON, MASS.

Aeroplane Lumber Specialists

Alaska Spruce
Black Walnut
Tough White Ash

CHETHAM LUMBER CO., Inc.
20 Exchange Place New York
Telephone, Hanover 6028

WILLIAMS AVIATION SCHOOL

Dual Dep Control Tractors
Tuition and Expenses Low

WILLIAMS AEROPLANE CO.
FENTON, MICH.

WE ILLUMINATE INSTRUMENT DIALS
WITH "LUMA"—BEST LUMINESCENCE

Permanently Visible in the Dark

Specify "LUMA DIALS" to Your Instrument Maker

RADIUM DIAL COMPANY
Forbes & Meyran Aves., Pittsburgh, Pa.

FOR SALE

Three used 100 H. P. 6 Cyl.
HARRIMAN MOTORS

Harriman Motors Co.
South Glastonbury, Conn.

AMERICAN PROPELLER & MFG.CO.
TRADE MARK
PARAGON
BALTIMORE MARYLAND U.S.A.

Heavy Elastic Aviation Cord

We manufacture a full and complete line of heavy elastic aviation cord. We are the originators and the largest manufacturers in the world of heavy elastic cord.

Standard H-3 equipped with our cord

J. W. WOOD ELASTIC WEB CO.
STOUGHTON, MASS.

Sanders Co.

ESTABLISHED 1905
Manufacturers of

AVIATORS' CLOTHING

Leather—Cravenette, Waterproof Canvass Duck, Government Khaki, Extra Heavy Russian Linen, Army White Duck Suits and Hoods Made to Order

Write for Catalog and Samples

Sanders Co.
218½ Indiana Ave.
Indianapolis, Ind.

FOXBORO
TRADE MARK

AIR SPEED INDICATOR

Forewarns and Prevents Stalling

Accurately indicates the relative wind pressure, the force that holds the plane in the air.
Light and compact.
Send for Bulletin No. BI-110.

THE FOXBORO CO., Inc.
FOXBORO, MASS., U. S. A.
New York Chicago San Francisco

Magnalite Pistons

(Aluminum Alloy)

Used as STANDARD by the most prominent Aviation Motor Manufacturers in the United States and abroad.

WALKER M. LEVETT COMPANY
417-419-421 E. 23rd St.,
NEW YORK.

STATEMENT OF THE OWNERSHIP, MANAGEMENT, CIRCULATION, ETC., REQUIRED BY THE ACT OF CONGRESS OF AUGUST 24, 1912, of AVIATION AND AERONAUTICAL ENGINEERING, published semi-monthly at New York, N. Y., for April 1, 1917.

State of New York } ss.
County of New York }

Before me, a Notary Public, in and for the State and county aforesaid, personally appeared Lester D. Gardner, who, having been duly sworn according to law, deposes and says that he is the President and Editor of the Gardner, Moffat Co., Inc., Publisher of Aviation and Aeronautical Engineering and that the following is, to the best of his knowledge and belief, a true statement of the ownership, management, etc., of the aforesaid publication for the date shown in the above caption, required by the Act of August 24, 1912, embodied in section 443, Postal Laws and Regulations, to wit:

1. That the names and addresses of the publisher, editor, managing editor, and business managers are:

Publisher, The Gardner, Moffat Company, Inc., 120 West 32nd St., New York, N. Y.; Editor, Lester D. Gardner, 120 West 32nd St., New York, N. Y.; Managing Editor, Herbert S. Williams, 120 West 32nd St., New York, N. Y.; Business Manager, Lester D. Gardner, 120 West 32nd St., New York, N. Y.

2. That the owners are: (Give names and addresses of individual owners, or, if a corporation, give its name and the names and addresses of stockholders owning or holding 1 per cent or more of the total amount of stock.)

The Gardner, Moffat Company, Inc., 120 West 32nd St., New York, N. Y.; Lester D. Gardner, 120 West 32nd St., New York, N. Y.; William I. Seaman, 20 Exchange Place, New York, N. Y.; William D. Moffat, 222 Fourth Ave., New York, N. Y.; Joseph H. Coit, 120 West 32nd St., New York, N. Y.

3. That the known bondholders, mortgagees, and other security holders owning or holding 1 per cent or more of total amount of bonds, mortgages, or other securities are: None.

4. That the two paragraphs next above, giving the names of the owners, stockholders, and security holders, if any, contain not only the list of stockholders and security holders as they appear upon the books of the company but also, in cases where the stockholder or security holder appears upon the books of the company as trustee or in any other fiduciary relation, the name of the person or corporation for whom such trustee is acting, is given; also that the said two paragraphs contain statements embracing affiant's full knowledge and belief as to the circumstances and conditions under which stockholders and security holders who do not appear upon the books of the company as trustees, hold stock and securities in a capacity other than that of a bona fide owner; and this affiant has no reason to believe that any other person, association, or corporation has any interest direct or indirect in the said stock, bonds, or other securities than as so stated by him.

LESTER D. GARDNER.

Sworn to and subscribed before me this twenty-ninth day of March, 1917.
[SEAL.] MANGHILD A. LINDBLOM.
My commission expires March 30, 1918.

Aeromarine
Plane & Motor Co.

Aeroplanes and Motors

New York Office: Times Building
Telephone, Bryant 6147

Wisconsin
CONSISTENT
AEROPLANE MOTORS
are correctly designed with the highest quality materials and workmanship.
Write for catalog of 6 and 12 cylinder models.
WISCONSIN MOTOR MFG. CO.
Station A. Dept. 338. Milwaukee, Wis., U. S. A.

For Your Flying Boats Use

All the prominent builders of flying boats use this glue in combination with linen between the veneer of the diagonal planking on all their flying boats, pontoons and floats. It is not only waterproof and elastic but will waterproof and preserve the linen indefinitely. Experience has shown that when this glue is used, owing to its elasticity, the inside layer of diagonal planking will remain perfectly water tight although the outside layer may be badly broken.

L. W. Ferdinand & Co.
152 Kneeland Street
Boston, Mass., U. S. A.

C. A. Herrmann

DESIGN AND CONSTRUCTION

Covering All Branches of Aviation

Bath, N. Y.

EXCELSIOR PROPELLERS

The propeller without an equal. They are superior to any propeller produced. They are used extensively by all the leading Aviators. Large stocks and prompt shipments. NO GRADES. THE BEST AT THE SAME PRICE FOR ALL. BOOKLETS FREE.

EXCELSIOR PROPELLER COMPANY
ST. LOUIS, MO.

MAXIMOTOR
IN A CLASS BY ITSELF

THE simplicity of our design, coupled with our eight years' practical experience constructing aviation motors, and the unlimited facilities at our command because of our location in Detroit—the heart of the motor industry in America—enable us to produce a motor that is right at a price that is right.

Send for Particulars

MAXIMOTOR COMPANY
1530 E. Jefferson Ave., Detroit, Mich.

Classified Advertising

10 cents a word, minimum charge $2.00, payable in advance. Address replies to advertisements with box numbers, care of AVIATION AND AERONAUTICAL ENGINEERING, 120 West 32d Street, New York.

WANTED, Anzani, Gnome or Gyro engine from 45 H. P. up. Address Box 31.

FOR SALE. One Model C-4 45 H. P. Kirkham motor, in first class condition, having had less than twenty hours' service. Price $500. Address H. L. Lewis, Peoples Gas Bldg., Chicago, Ill.

WANTED, airplane factory in Middle West wants man with experience in handling employes and capable of taking charge of factory. Also needs draftsmen, glue-men and men with experience in assembling. Address Box 28.

FOR SALE, Flying boat suitable for training. Good flyer. Cheap. Also one 7½ ft. dia. by 5½ ft. pitch, tractor propeller and pair of Rome-Turney side radiators. Address Box 10.

YOUNG MAN of twenty wants to learn aviation. Wishes to get in with a good company or private party. Address Box 25.

FOR SALE, 6 cyl. 50 H. P. Kirkham engine. Good shape. Cheap for cash. Address Box 30.

Aeronautical Trade Directory

AVIATION AND AERONAUTICAL ENGINEERING will furnish information and addresses of all companies listed below. **Names of Advertisers in this issue are printed in heavy face type.**

ACETYLENE WELDING AND CUTTING
Davis-Bournonville Co.
Searchlight Co.

ACCESSORIES AND INSTRUMENTS
DuVivier, Earnest J.
Moto-Meter, The, Co.
O'Hara Waltham Dial Co.
Standard Aeronautical Co.
Taylor Instrument Companies

AIRPLANES
Aeromarine Sales and Engineering Corp.
Bates Aeroplane Co.
Benoist Aeroplane Co.
Burgess Co., The
Carter Bros. Aeroplane Co.
Cooper, John D., Aeroplane Co.
Chicago Aero Works.
Christofferson Aircraft Mfg. Co.
Curtiss Aeroplane and Motor Corp.
Gallaudet Aircraft Corp.
General Aeroplane Co.
Heath, E. B., Aerial Vehicle Co.
Heinrich, The A. S. Corp.
Herrmann, Chas. A.
International Aircraft Co.
Janney Aircraft Co.
L. W. F. Engineering Co.
Lanzius Aircraft Co.
Lawrence-Lewis Aeroplane Co.
New Jersey Aeroplane Co.
New York Aero Construction Co.
Pacific Aero Products Co.
Pierce, Samuel S., Aeroplane Corp.
Rumsey Aeroplane Co.
Smith, Kyle, Aircraft Co.
Standard Aero Corporation.
Sturtevant Aeroplane Co.
Thomas-Morse Aircraft Corp.
United Eastern Aeroplane Co.
Williams Aeroplane Co.
Wittemann-Lewis Aircraft Co.
Wright-Martin Aircraft Corp.

AIRPLANE ENGINES
Aeromarine Plane and Motor Co.
Ashmusen Mfg. Co.
Atwood Aeronautic Co.
Bournonville Motors Corp.
Brooke, Thomas Preston.
Christofferson Motor Corp.
Curtiss Aeroplane and Motor Corp.
Duesenberg, Fred S., Motor Co.
General Ordnance Co.
General Vehicle Co.
Gyro Motor Co.
Hall-Scott Motor Car Co.
Harriman Aircraft Motors Co., Inc.
Knox Motors Co.
Maximotor Co.
Miller, Harry A., Mfg. Co.
New Jersey Aeroplane Co.
Orlo Motor Co.
Packard Motor Co.
Roberts Motor Mfg. Co.
Sterling Engine Co.
Sturtevant, B. F., Co.
Taft Pierce Mfg. Co
Thomas-Morse Aircraft Corp.
Union Gas Engine Co.
Wisconsin Motor Mfg. Co.
World's Motor Co.
Wright-Martin Aircraft Corp.

AIRPLANE PARTS
Chicago Aeronautical Supply Co.
Erie Specialty Co.

ALUMINUM
Aluminum Castings Co.
Aluminum Co. of America
American Metal Co., Ltd.
So-Luminum Mfg. & Eng. Co. (Solder)

AVIATION SCHOOLS
America Trans Oceanic Co., The
Beam School of Aviation
Christofferson Aviation School
Curtiss Training Schools
Davenport Aviation School
Dodge School of Aviation
Hall Flying School
Stinson School of Aviation
Thomas-Morse Aircraft Corp.
Williams Aviation School

BALL BEARINGS
Hess-Bright Mfg. Co.
New Departure Mfg. Co.
Norma Company of America.
S. K. F. Ball Bearings

BALLOONS AND DIRIGIBLES
Connecticut Aircraft Co.
Custer Specialty Co. (Statoscope)
French-American Balloon Co.
Goodyear Tire and Rubber Co.
Janney-Steinmetz and Co. (Hydrogen Cylinders)
United States Rubber Co.

BAROGRAPHS AND BAROMETERS
Green, Henry J.
Haustetter, A.
Sussfield & Lorch
Taylor Instrument Companies

BATTERIES
Electric Storage Battery Co.

BEARING METALS
American Bronze Co.
Fahrig Metal Co.
Magnolia Metal Co.

CARBURETORS
Miller Carburetor Co.
Stromberg Motor Devices Co.
Wheeler and Schebler
Zenith Carburetor Co.

CLOCKS AND WATCHES
Ingersoll, Robt. H., and Bro.
Chelsea Clock Co.
Depollier, J., & Son
Waltham Watch Co.

CLOTHING
Abercrombie & Fitch
Cross, Mark
Meyrowitz, E. B. (goggles)
N. Y. Sporting Goods Co.
Rogers, Peet & Co.
Sanders Co.
Spaulding, A. G., & Bros.

COMPASSES
Sperry Gyroscope Co.
Taylor Instrument Companies

DOPE AND VARNISH
Adams & Elting Co.
American Emaillite Co.
Chemical Products Co.
Conover, The C. E., Co.
DuPont Chemical Works
Flexible Compound Co.
National Aeroplane Co.
Pratt & Lambert
Standard Varnish Works
Valentine & Co.

DRIFT INDICATOR
Sperry Gyroscope Co.

DYNAMOMETER
Sprague Electric Works

ENGINE PARTS
Allegheny Forging Co.
Burd High Compression Ring Co.
Doehler Die Casting Co.
Erie Specialty Co.
Fibre Finishing Co.
Gifford, Leland Co.
Gill, P. H., & Sons
Hydraulic Pressed Steel Co.
Levett, Walker M., Co.
Park Drop Forge Co.
Standard Parts Co.
Taft-Pierce Mfg. Co.
Tioga Steel & Iron Co.
Williams, J. H., & Co.
Wyman-Gordon Co.

EXHIBITION COMPANIES
The Cessna Exhibition Co.
Granburg, Gustav
Miller Aeroplane Co.
Weeks-Smalley Co.

FABRICS
Courtral Mfg. Co.
Lamb, Finlay & Co.
McBratney, Robt. & Co.
Scott, Hutchison Co.
Whitman, Clarence & Co.

FIRE EXTINGUISHERS
Fyr-Fyter Co., The
Johns-Manville Co., H. W.
Pyrene Mfg. Co.

GASKETS
Fibre Finishing Co.

GLUE
Ferdinand, L. W., & Co.

GAGES
Crosby Steam Gage & Valve Co.
Foxboro Co., The, Inc.
United States Gage Co.

HANGARS
American Bridge Co.
Anchor Corrugating Constr. Co.
Ashley Steel Bldg. Co.
Howell, Field & Goddard, Inc.
Keasby & Mattison
Milliken Bros.

LIFE PRESERVERS
Universal Safety Mattress Co.

LUMINOUS COMPOUND
Cold Light Mfg. Co.
Radium Dial Co.
Radium Luminous Material Corp.

MAGNETOS
Bosch Magneto Co.
Berkshire Magneto Corp.
Ericsson Mfg. Co.
Remy Electric Co.
Splitdorf Electrical Co.

METALS
American Vanadium Co.
Acieral Co. of America (Aluminum Steel)
Bethlehem Steel Co.
Detroit Pressed Steel Co.
Federal Pressed Steel Co.
Garland Ventilator Co.
Gueder, Paeschke & Frey Co.

MODEL AIRPLANES
Ideal Aeroplane Supply Co.
Wading River Mfg. Co.

MOTORCYCLES
Excelsior Motor Mfg. Supply Co.
Harley-Davison Co.
Hendee Mfg. Co.
Militare Motor Vehicle Co. of America

OILS AND LUBRICANTS
Baker Castor Oil Co.
Graphite Lubricant Co.
Gulf Refining Co.
Sheppard Ideal Oil Co.
Standard Oil Co.
Texas Co.
Vacuum Oil Co.

OIL PUMPS
Wayne Oil Tank & Pump Co.

ORDNANCE
Buck Air Craft and Munitions Co.
Colt Firearms Co.
Driggs-Seabury Ordnance Corp.
General Ordnance Co.
Maxim Silencer Co.
Savage Arms Co.

PACKING
Fibre Finishing Co.

PHOTOGRAPHY
Brock, Arthur, Jr.
Herbert & Huesgen Co.

PONTOONS
Niagara Boat Co.
Welen Marine Equipment Co.

PROPELLERS
American Propeller & Mfg. Co.
Aviauto Mfg. Co.
Buffalo Aeroplane Corp.
C. M. O. Physical Laboratory
Excelsior Propeller Co.
Washington Aeroplane Co.

PYROMETERS
Foxboro Co., The, Inc.
Shore Instrument & Mfg. Co.
Taylor Instrument Companies

RADIATORS
Ajax Auto & Aero Sheet Metal Co.
A-Z Co.
Bush Mfg. Co.
El Arco Radiators Co.
Livingston Radiator Co.
Rome-Turney Radiator & Mfg. Co.

SCELEROSCOPE
Shore Instrument & Mfg. Co.

SEA SLEDS
Murray & Tregurtha

SPARK PLUGS
Champion Ignition Co.
Johns-Manville Co., H. W.
Pyro Ignition Co.
Rajah Auto Supply Co.
Splitdorf Electrical Co.

SPEED INDICATORS
Foxboro Co., The, Inc.
Stewart Warner Speedometer Corp.

STABILIZERS
Greene Aeronautical Co.
Martin Arodynamic Stabilizer.
Sperry Gyroscope Co.

STARTERS
Bijur Motor Lighting Co.
Christensen, The, Engineering Co.
Dayton Engineering Laboratories Co.
Motor Compressor Co.
Northeast Electric Co.
Wagner-Hoyt Electric Co.

TACHOMETERS
Nelson Blower & Furnace Co.
Queen-Gray Co.
Stewart Warner Speedometer Corp.
Veeder Mfg. Co.

TANKS
Janney, Steinmetz & Co.

TELEPHONES
General Accoustic Co. (Aviaphone).
Streator Electric Co.
Telautograph Corp.
Western Electric Co.

THERMOMETERS
Foxboro Co., The, Inc.
Taylor Instrument Companies

TIRES AND RUBBER
Goodyear Tire & Rubber Co.
Hodgman Rubber Co.
United States Rubber Co.
Ward, J. W., Elastic Cord Co.
Whitley Exerciser Co.

TOOLS
Browne & Sharpe
Cooper, The John D., Aeroplane Co.
Hall-Scott Motor Car Co.

TRUCKS AND TRAILERS
Federal Motor Truck Co.
Four Wheel Drive Auto Co.
Nash Motors Co.
Packard Motor Car Co.
Sechler & Co., The
Service Motor Truck Co.
White Co.

TUBING
Empire Art Metal Co.
Frasse, Peter A., & Co.

TURNBUCKLES
Aero Mfg. & Accessories Co.
Ajax Iron Works
C. E. Aeroplane Works
Dillner-Meyer Mfg. Co.
Erie Specialty Co.
National Aeroplane Co.
New York & Hagerstown Metal Stamping Co.
Standard Screw Co.

WHEELS
Ackerman Wheel Co.

WIRE
American Steel and Wire Co.
Electric Cable Co.
Roebling's, John A., Sons
Simplex Wire and Cable Co.

WIRELESS
American Radio & Research Corp.
American Wireless Tel. Co.
Cutting & Washington.

WOODS
Alcock Co., John L.
American Balsa Corp.
Chetham Lumber Co.
Delatour, J.
Dutton, A. C. Lbr. Corp.
Ludlow, Israel
Mengel, C. C., & Bros. Co.

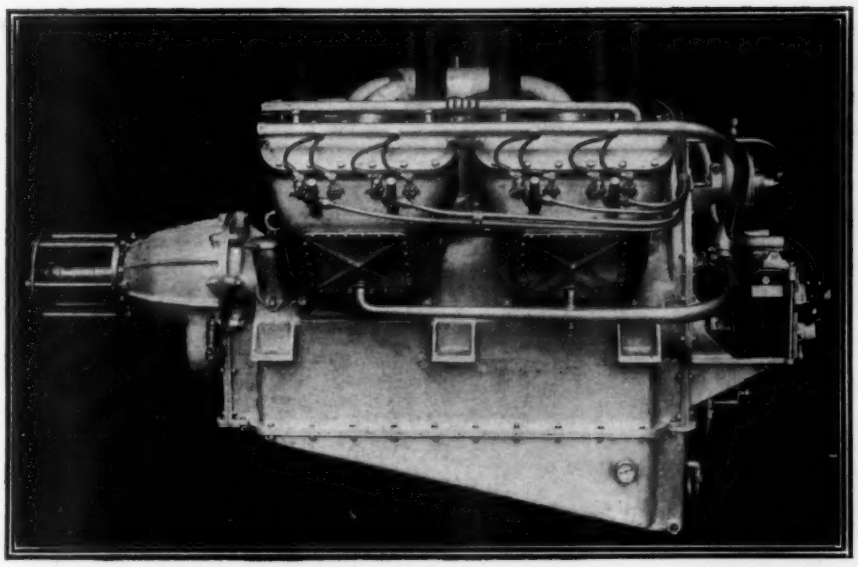

THOMAS 135 H. P. AEROMOTOR

With the increased facilities afforded by a **new concrete steel factory** and **additional manufacturing equipment,** we shall be able to meet the ever increasing demand for **Thomas Aeromotors**

Contractors to U. S. Army and Navy

THOMAS-MORSE AIRCRAFT CORPORATION

Successors to THOMAS BROS. AEROPLANE CO., Inc. THOMAS AEROMOTOR COMPANY, Inc. ***Ithaca, N. Y.***

BURGESS PRIMARY TRAINING TRACTOR, TYPE B. P.

This machine was designed by W. Starling Burgess at the request of the United States Army for a primary training tractor airplane having a practical side by side seating arrangement with duplicate controls.

This has been accomplished without sacrificing in the least the efficiency or appearance of the machine.

It fills the urgent need found at present in the aviation schools—giving great range of control and allowing the instructor to be at side of the pupil during flight, thereby facilitating instruction.

This has been proven very satisfactorily in experimental flights as well as in the official trials through which this machine passed with great success.

THE BURGESS COMPANY, Marblehead, Mass.

MANUFACTURERS OF THE BURGESS-DUNNE AND BURGESS SEAPLANES
SOLE LICENCEES FOR THE DUNNE PATENTS

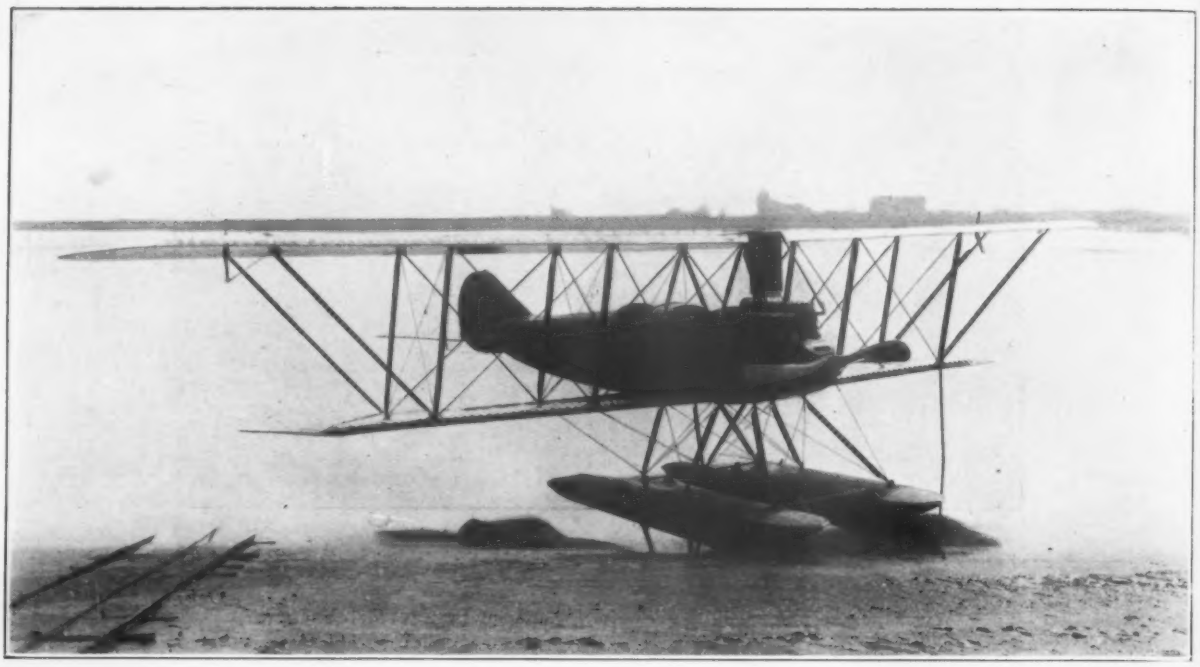

THE MARTIN TWO PLACE
RECONNAISSANCE TRACTOR
MODEL R
Convertible Land and Water

Ordered by
the United States Army and Navy
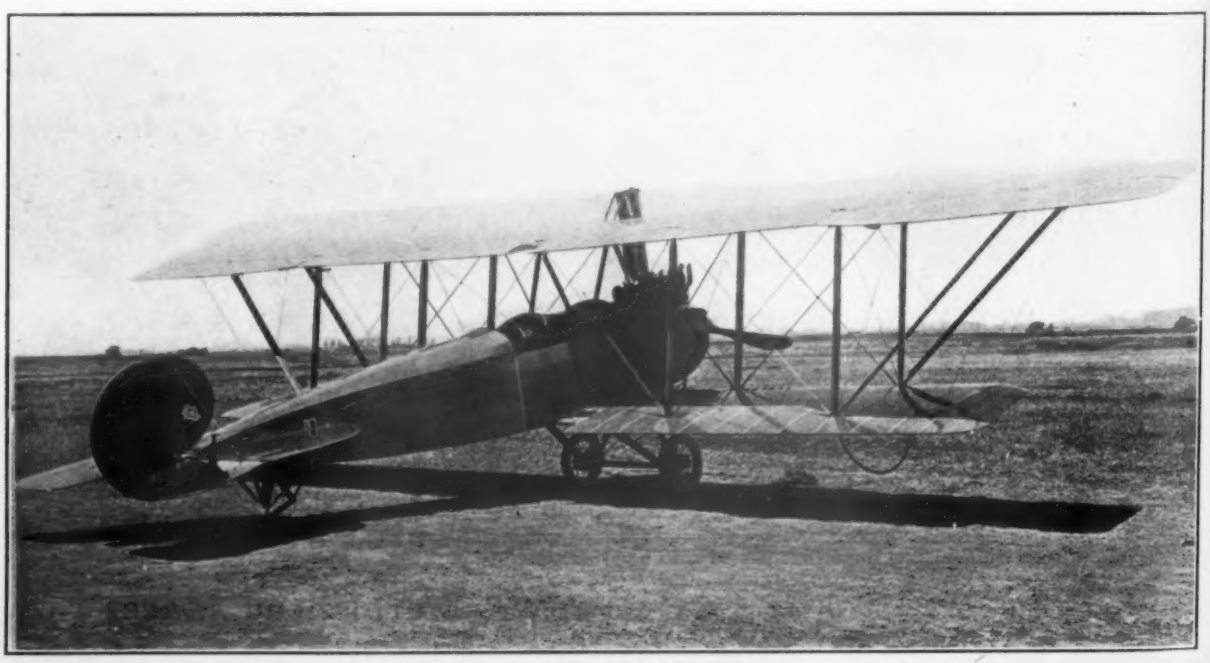
Wright-Martin Aircraft Corporation